V3.2 NOTE: THIS DEVICE IS ROHS COMPLIANT.

REVISIONS							
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE	APPROVED
⚠	MODIFY DIMENSION	15/OCT/21'	AARON	△			
△				△			
**CUSTOMER DRAWING FOR REFERANCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!							082

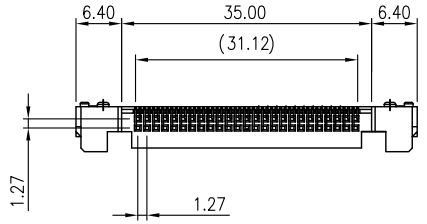

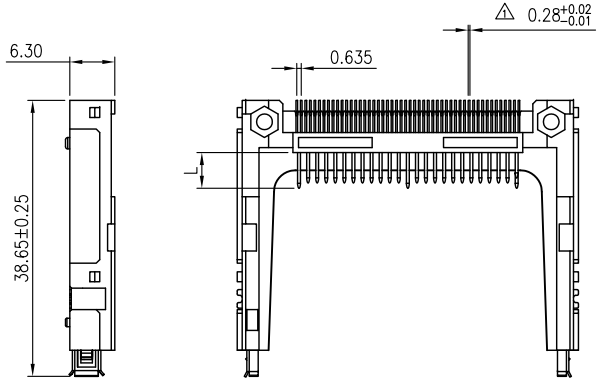

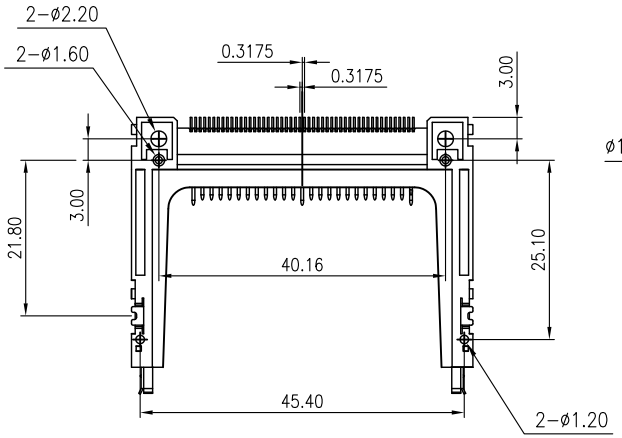

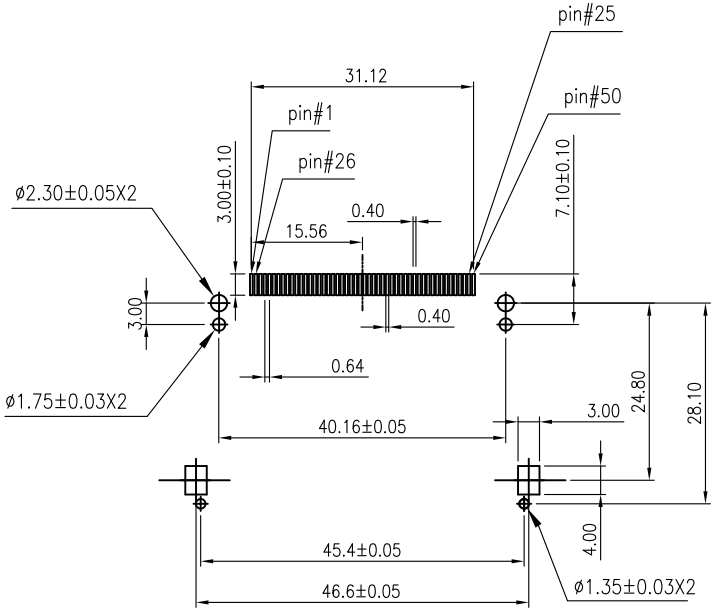

P.C.B LAYOUT

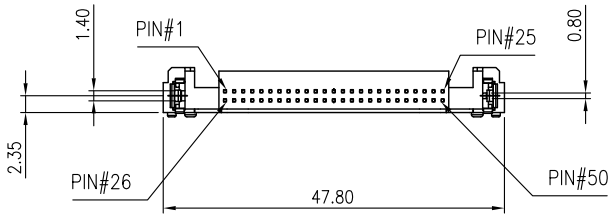

SPECIFICATION:
- HOUSING: HIGH TEMPERATURE PLASTIC UL94V-0
- CONTACTS: COPPER ALLOYS
- VOLTAGE RATING: 100VAC
- CURRENT RATING: 0.5A
- CONTACT RESISTANCE: 40 m OHM MAX
- INSULATION RESISTANCE: 1000M OHM MIN
- DIELECTRIC STRENGTH: 500VAC/1MIN
- OPERATION TEMPERATURE: -40°C~85°C

ORDER INFORMATION:
- CFC003-RtM50GX-A-L
- CFC: COMPACT FLASH CARD CONNECTOR
- 003: SERIES NO.
- Rt: PCB TYPE, RIGHT ANGLE AND SURFACE MOUNT
- M: MALE
- 50: NO. OF CONTACT
- GX: PLATING OPTION
  - -Gft: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL
  - -G15t: 15U" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
- A: TOP MOUNT TYPE
- L: WITH LATCH

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.25			SIGNATURES	DATE	MODEL
			DRAWN ALAN	14/MAY/14'	TITLE: CF CARD CONNECTOR
SYMBOL △	UNIT mm	SCALE 1/1	CHECKED AARON	14/MAY/14'	NO. CFC003-RtM50G_-A-L
			APPROVALS		

MMT CORPORATION

TEL:(510)979-2188 www.mmtmachrone.com FAX:(510)979-2189