

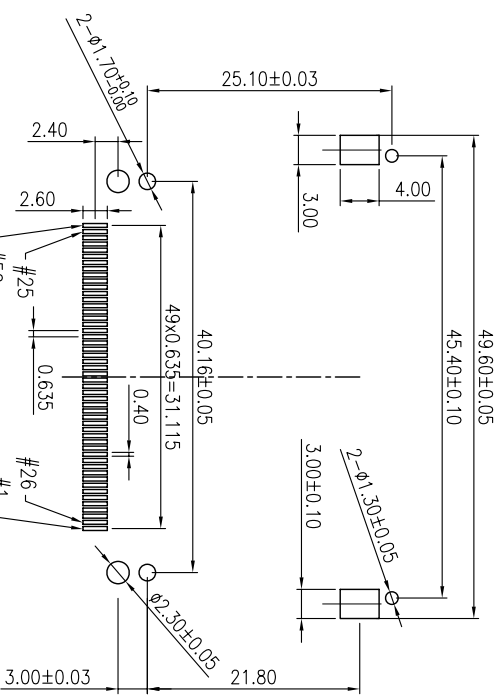
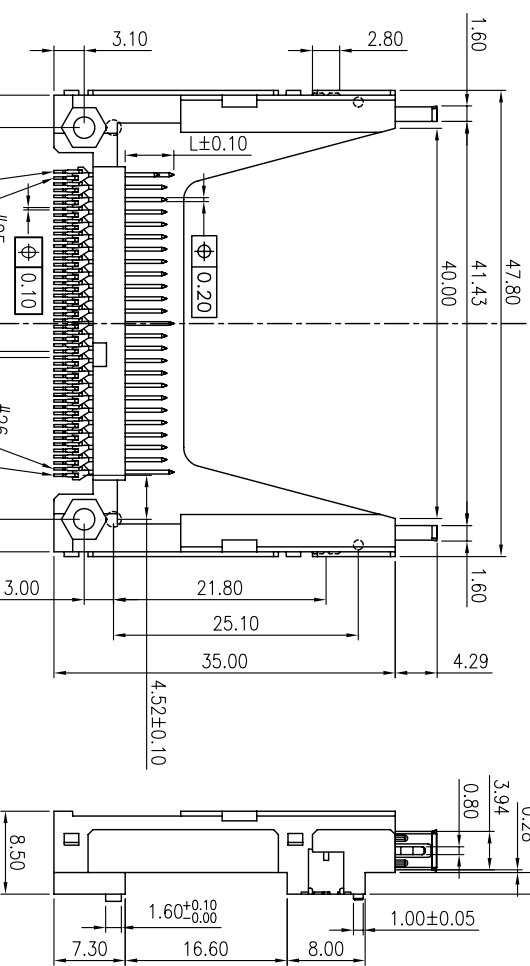


REVISIONS						
NO	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE
1	MODIFY DRAWING	15/JUL/10	AARON	△		
2				△		
3						
4						
5						
6						
7						
8						
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						
21						
22						
23						
24						
25						
26						
27						
28						
29						
30						
31						
32						
33						
34						
35						
36						
37						
38						
39						
40						
41						
42						
43						
44						
45						
46						
47						
48						
49						
50						
51						
52						
53						
54						
55						
56						
57						
58						
59						
60						
61						
62						
63						
64						
65						
66						
67						
68						
69						
70						
71						
72						
73						
74						
75						
76						
77						
78						
79						
80						
81						
82						
83						
84						
85						
86						
87						
88						
89						
90						
91						
92						
93						
94						
95						
96						
97						
98						
99						
100						

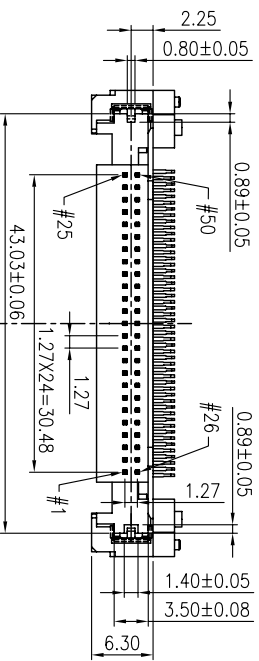

RECOMMENDED P.C.B LAYOUT
TOLERANCES: $\pm 0.05\text{mm}$

ORDER INFORMATION:
CFC003-RIM50GX-A1-L
CFC: COMPACT FLASH CARD CONNECTOR
003: SERIES NO.
Rt: PCB TYPE, RIGHT ANGLE AND SURFACE MOUNT
M: MALE
50: NO. OF CONTACT
GX: PLATING OPTION
-Gf: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL
-G15t: 15U" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
-G30t: 30U" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
A1: DIM L= 8.50
L: LATCH OPTION

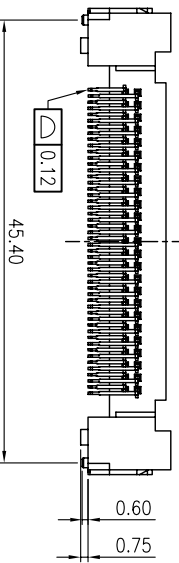

PIN TYPE	DIM.	PIN NO.
POWER	5.0	1, 13, 38, 50
GENERAL	4.25	ALL OTHER PIN
DET/EC	3.5	25, 26

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.25			SIGNATURES		DATE	MODEL	
			DRAWN	AARON	30/NOV/07	TITLE	
			CHECKED	WENDY	30/NOV/07	CF CARD CONNECTOR	
SYMBOL			UNIT		SCALE	APPROVALS	
△			mm		1/1	NO.	
						CFC003-R1M50G--A1-L	

MMT CORPORATION

MATERIAL
INSULATOR: THERMAL PLASTIC UL94V-0
CONTACT: COPPER ALLOY
MOUNT EAR: COPPER ALLOY