



REVISIONS					
SYM	DISCRPTION	DATE	APPROVED	SYM	DATE
Δ				Δ	
Δ				Δ	

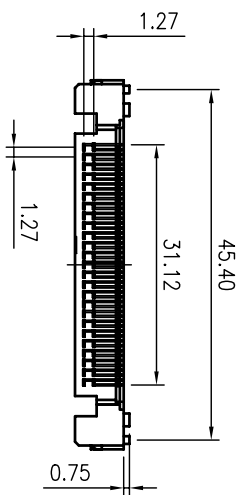


SPECIFICATION:
INSULATOR: GLASS REINFORCED LCP U94V-0
CONTACT: BRASS
MOUNT EAR: BRASS; TIN/LEAD PLATED OVERALL
CONTACT AREA: GOLD FLUSH PLATING OVER 40u" NICKEL
SOLDER TAIL AREA: 100u" TIN/LEAD PLATING OVER 40u" NICKEL


ORDER INFORMATION:
CFC003-R1M50Gt-B-L
CFC: COMPACT FLASH CARD CONNECTOR
003: SERIES NO.
R: PCB TYPE, RIGHT ANGLE AND SURFACE MOUNT
M: MALE
50: NO. OF CONTACT
GX: PLATING OPTION
-Gt: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL
-G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
-G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
B: REVERSE MOUNT TYPE
L: LATCH OPTION

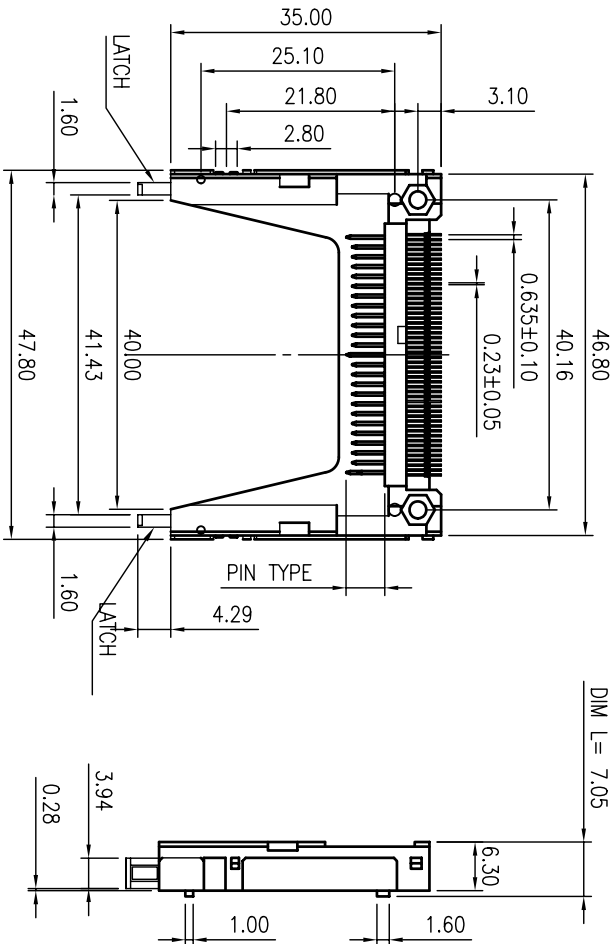

PIN TYPE	DIM.	PIN NO.
POWER	5.0	1, 13, 38, 50
GENERAL	4.25	ALL OTHER PIN
DETEC	3.5	25, 26

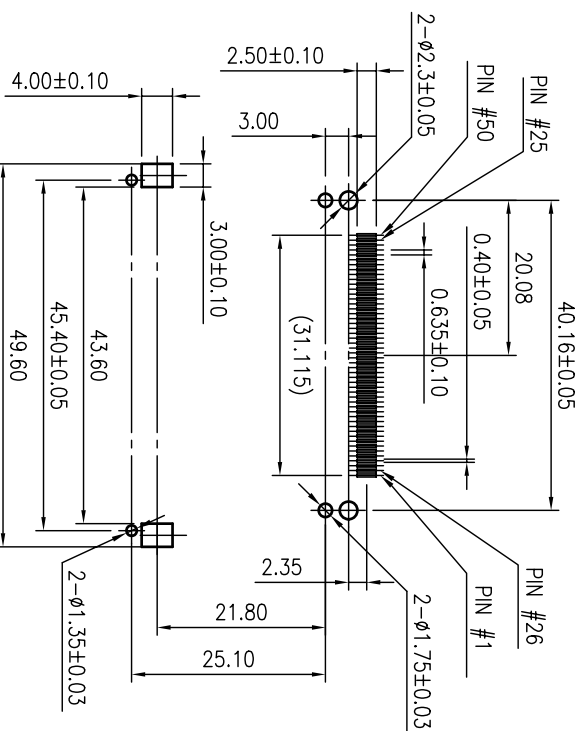

RECOMMENDED P.C.BOARD LAYOUT

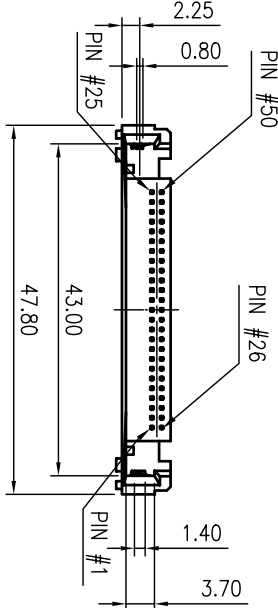

TOLERANCES UNLESS OTHERWISE SPECIFIED			SIGNATURES		DATE	MODEL	
±0.25			DRAWN	AARON	30/NOV/05'	CF CARD CONNECTOR	
			CHECKED	WENDY	30/NOV/05'		
			APPROVALS			NO.	
SYMBOL	UNIT	SCALE					CFC003-RtM50GX-B-L
△	mm	1/1					

MMT CORPORATION