

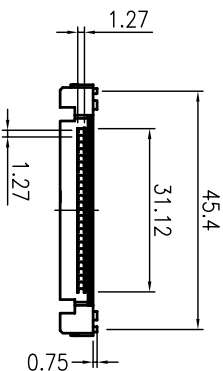
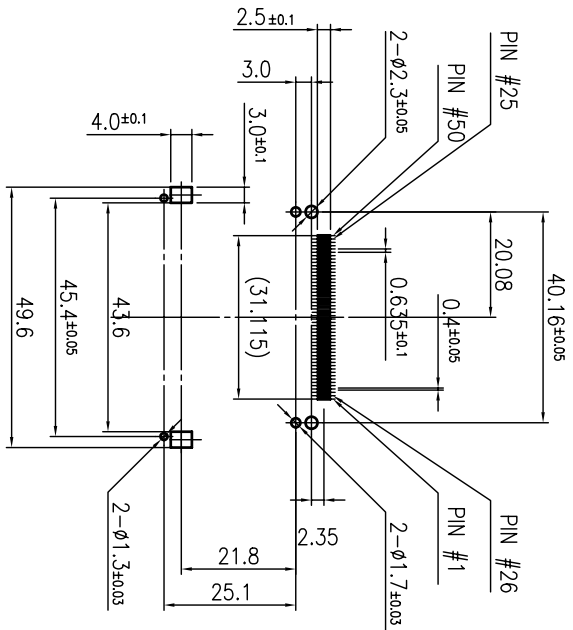


REVISIONS					
SYM	DISCRIPTION	DATE	APPROVED	SYM	DISCRIPTION
Δ			Δ		
Δ			Δ		

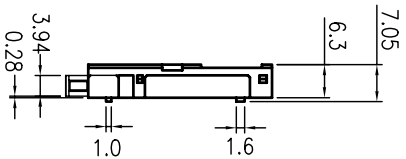


SPECIFICATION:
INSULATOR: GLASS REINFORCED LCP UL94V-0
CONTACT: BRASS
MOUNT EAR: BRASS, TIN/LEAD PLATED OVERALL
CONTACT AREA: GOLD FLUSH PLATING OVER 40u" NICKEL
SOLDER TAIL AREA: 100u" TIN/LEAD PLATING OVER 40u" NICKEL

ORDER INFORMATION:
CFC003-R1M50Gft-B
CFC: COMPACT FLASH CARD CONNECTOR
003: SERIES NO.
R: PCB TYPE, RIGHT ANGLE AND SURFACE MOUNT
M: MALE
50: NO. OF CONTACT
Gft: TERMINAL PLATING, GOLD FLUSH ON CONTACT, TIN
PLATING ON SOLDER TAIL
B: BOTTOM MOUNT
L: LATCH OPTION

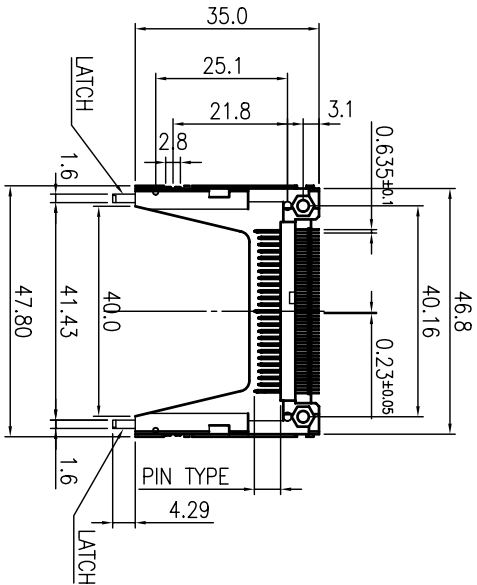

PIN TYPE	DIM.	PIN NO.
POWER	5.0	1, 13, 38, 50
GENERAL	4.25	ALL OTHER PIN
DETEC	3.5	25, 26

RECOMMENDED P.C.BOARD LAYOUT

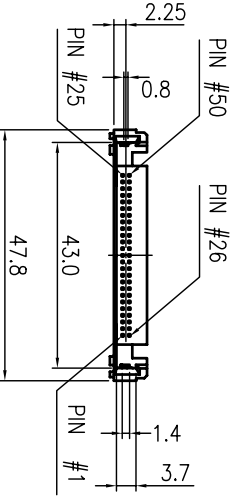

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.25			SIGNATURES		DATE	MODEL
SYMBOL	UNIT	SCALE	DRAWN	AARON	17/NOV/05	TITLE
Δ	mm	1/1	CHECKED	WENDY	17/NOV/03	CF CARD CONNECTOR
			APPROVALS			NO. CFC003-R1M50Gft-B-L

MMT CORPORATION