
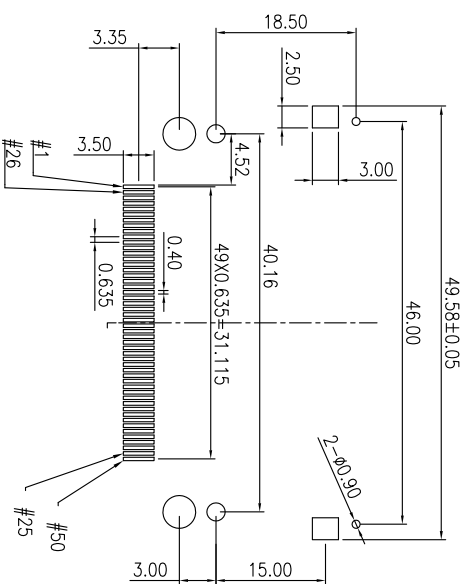



SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE	APPROVED
Δ				Δ			
Δ				Δ			
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!							204

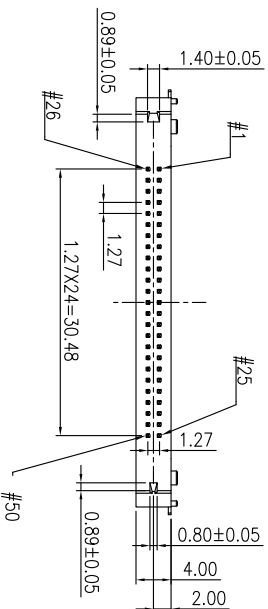


RECOMMENDED P.C.BOARD LAYOUT

SPECIFICATIONS:
VOLTAGE RATING: 100VAC
CURRENT RATING: 0.5A
CONTACT RESISTANCE: 40m Ω MAX
INSULATION RESISTANCE: 1000M Ω MIN
DIELECTRIC STRENGTH: 500VAC/1min
OPERATION TEMPERATURE: -55°C~85°C
DURABILITY: 10000 CYCLE
INSERTION FORCE: 28.8N
EXTRACTION FORCE: 4.9N

MATERIALS
HOUSING: LCP UL94-0, COLOR: WHITE
CONTACT: BRASS C2680, GOLD PLATED OVER NICKEL
HOLDDOWN: BRASS C2680, TIN PLATED

PIN TYPE	DIM. L	PIN NO.
POWER	5.00mm	1, 13, 38, 50
GENERAL	4.25mm	ALL OTHER PINS
DETECT	3.50mm	25, 26

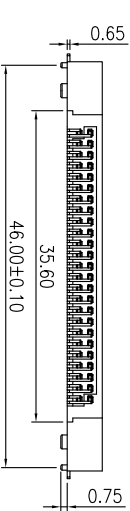

ORDER INFORMATION:
CFC010-RtM50G15t-B
CFC: CF CARD CONNECTOR
010: SERIES NO.
Rt: PCB TYPE, RIGHT ANGLE SURFACE MOUNT TYPE
M: MALE
50: 50 OF CONTACTS
G15t: 15u" GOLD ON CONTACT, TIN PLATING ON SOLDER TAIL
-B: BOTTOM MOUNT

TOLERANCES UNLESS OTHERWISE SPECIFIED			SIGNATURES		DATE	MODEL
±0.25			DRAWN	SAM	16/AUG/12	CF CARD CONNECTOR
SYMBOL			CHECKED	AARON	16/AUG/12	NO.
UNIT			APPROVALS			CFC010-RtM50G15t-B
mm						
SCALE						
2/1						

MMT CORPORATION