
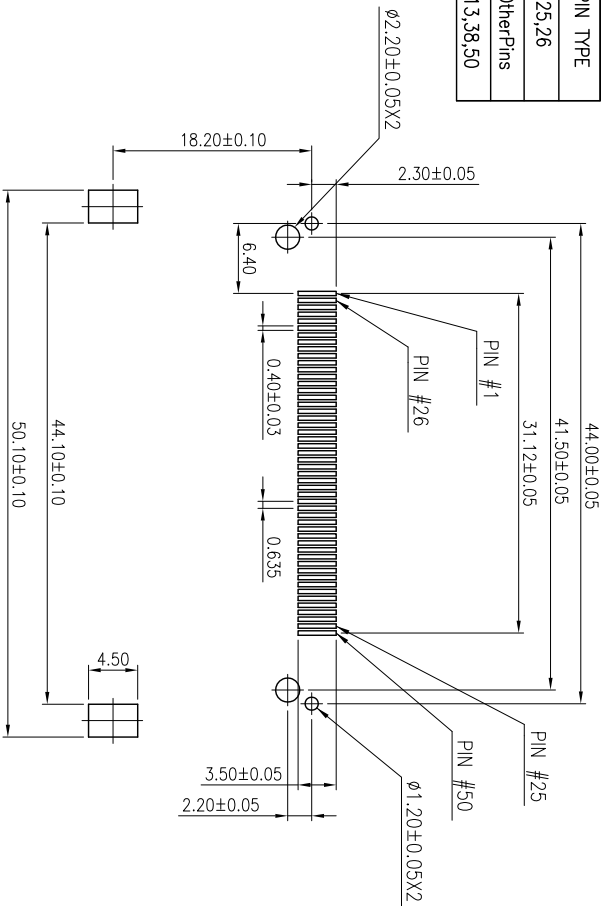
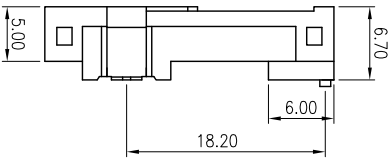


SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE	APPROVED
Δ				Δ			
Δ				Δ			
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!							082


PIN TYPE	DM.L	PIN TYPE
DETECT	3.5 mm	25,26
GENERAL	4.25 mm	All Other Pins
POWER	5.0 mm	1,13,38,50

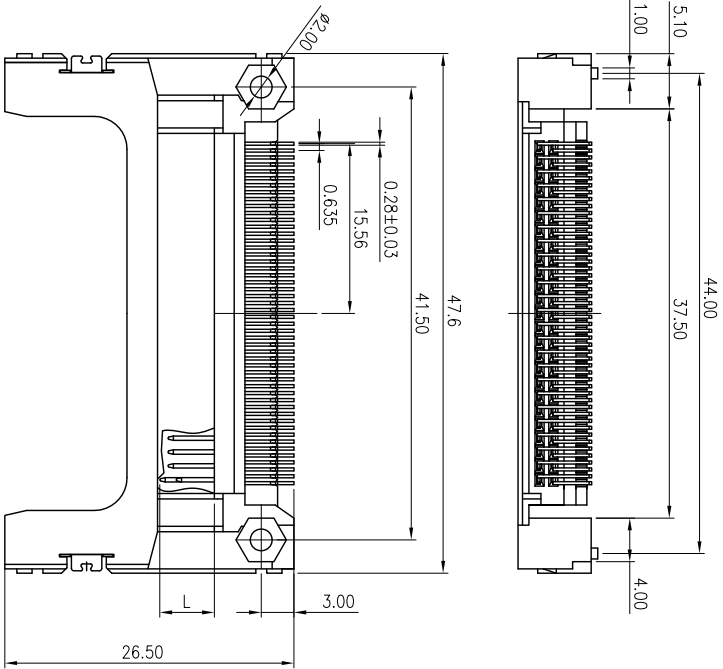

PCB LAYOUT

SPECIFICATIONS:
HOUSING: HIGH TEMPERATURE PLASTIC, UL 94V-0
CONTACT: COPPER ALLOYS
VOLTAGE RATING: 100VAC
CURRENT RATING: 0.5A
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 1000MΩ MIN.
DIELECTRIC STRENGTH: 500VAC/1min
OPERATION TEMPERATURE: -40°C~85°C

ORDER INFORMATION:
CFC019-RtM50G15t-A
CFC: CF CARD CONNECTOR
019: SERIES NO.
Rt: PCB TYPE, RIGHT ANGLE SURFACE MOUNT TYPE
M: MALE
50: 50 OF CONTACTS
G15t: 15u" GOLD ON CONTACT,
TIN PLATING ON SOLDER TAIL
-A: TOP MOUNT

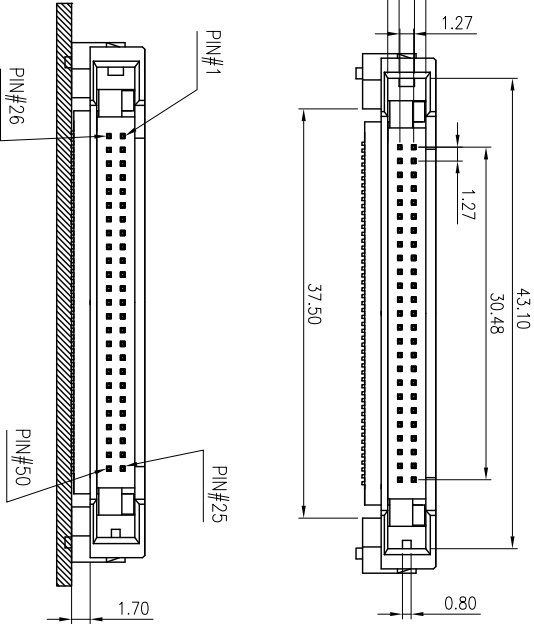

TOLERANCES UNLESS OTHERWISE SPECIFIED		SIGNATURES		DATE		MODEL	
±0.25		DRAWN	AARON	03/AUG/16		CF CARD CONNECTOR	
		CHECKED	NATHAN	03/AUG/16			
		APPROVALS					
SYMBOL	UNIT	SCALE					
Δ	mm	2/1					

MMT CORPORATION