
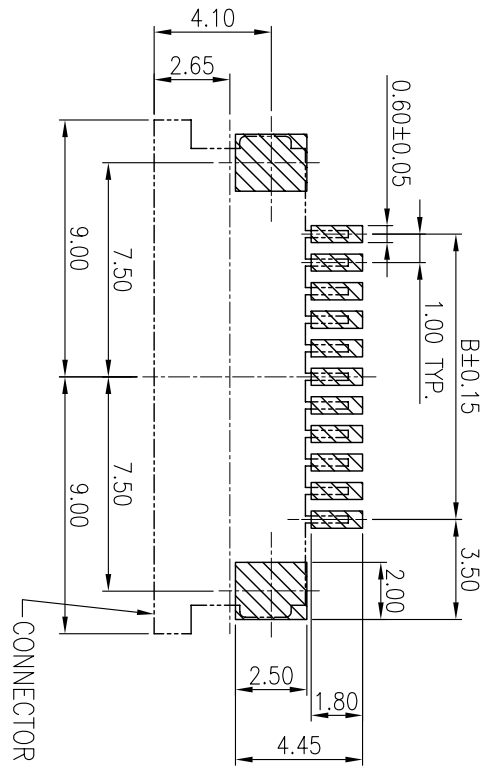
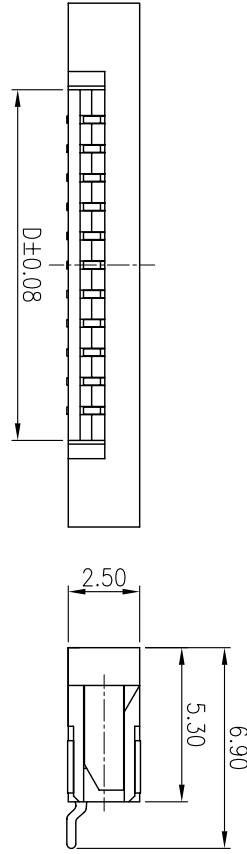
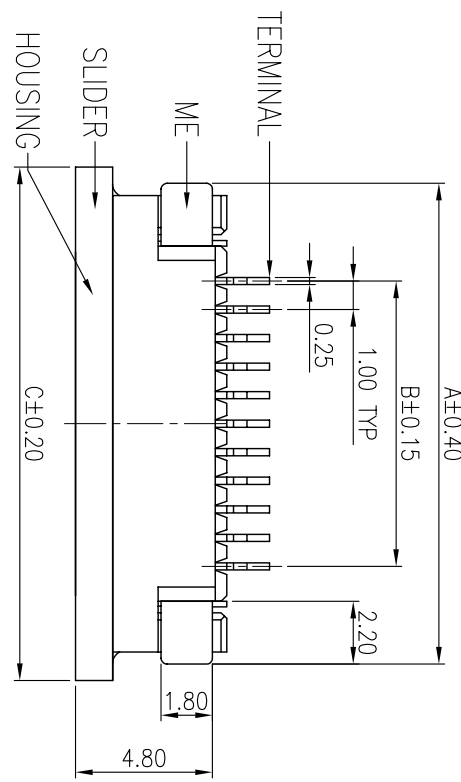
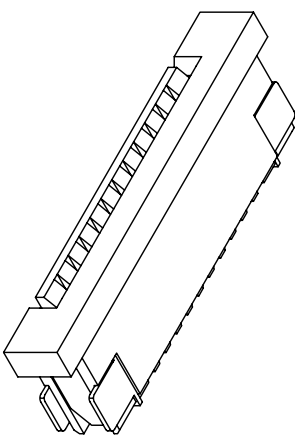


REVISIONS						
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE
Δ	NOTE ROHS STANDARD	16/JUN/05	CONNIE	Δ		
Δ	MODIFY PCB LAYOUT	12/OCT/10	AARON	Δ		
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!						1/78

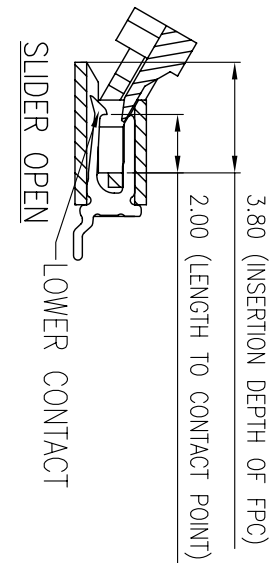

RECOMMENDED PCB LAYOUT

PERFORMANCE CHARACTERISTICS
OPERATING VOLTAGE: 100 VAC
CURRENT RATING: 0.5 AMP
CONTACT RESISTANCE: 30MΩ MAX.
INSULATION RESISTANCE: 500MΩ MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC RMS.
ACCOMMODATED FFC/FPC THICKNESS: 0.25±0.35 MM
OPERATING TEMPERATURE: -40°C TO +85°C

MATERIAL
INSULATOR: PA9T;UL94V-0 RATED (COLOR: BLACK)
SLIDER: PPS; UL94V-0 RATED (COLOR: SEE INFORMATION)
TERMINAL: PHOSPHOR BRONZE
ME: BRASS
PLATING: SEE ORDERING INFORMATION

ORDER INFORMATION:
FPCe202-R1X1T-X
FPC: FPC CONNECTOR
e: PITCH=1.00 mm
202: SERIES NO.
Rt: PCB TYPE, RIGHT ANGLE
XX: NUMBER OF CONTACTS
T: PLATING, TIN PLATING
X: PACKING OPTION
T: TUBE
T/R: TAPE & REEL (PLEASE CONTACT FACTORY FOR AVAILABLE NO. OF PINS)

MODEL NO.	NO. of Pins	DIMENSIONS			
		A	B	C	D
FPCe202-R104T-X	4	9.85	3.00	11.00	5.15
FPCe202-R105T-X	5	10.85	4.00	12.00	6.15
FPCe202-R106T-X	6	11.85	5.00	13.00	7.15
FPCe202-R107T-X	7	12.85	6.00	14.00	8.15
FPCe202-R108T-X	8	13.85	7.00	15.00	9.15
FPCe202-R109T-X	9	14.85	8.00	16.00	10.15
FPCe202-R110T-X	10	15.85	9.00	17.00	11.15
FPCe202-R111T-X	11	16.85	10.00	18.00	12.15
FPCe202-R112T-X	12	17.85	11.00	19.00	13.15
FPCe202-R113T-X	13	18.85	12.00	20.00	14.15
FPCe202-R114T-X	14	19.85	13.00	21.00	15.15
FPCe202-R115T-X	15	20.85	14.00	22.00	16.15
FPCe202-R116T-X	16	21.85	15.00	23.00	17.15
FPCe202-R117T-X	17	22.85	16.00	24.00	18.15
FPCe202-R118T-X	18	23.85	17.00	25.00	19.15
FPCe202-R119T-X	19	24.85	18.00	26.00	20.15
FPCe202-R120T-X	20	25.85	19.00	27.00	21.15
FPCe202-R121T-X	21	26.85	20.00	28.00	22.15
FPCe202-R122T-X	22	27.85	21.00	29.00	23.15
FPCe202-R123T-X	23	28.85	22.00	30.00	24.15
FPCe202-R124T-X	24	29.85	23.00	31.00	25.15
FPCe202-R125T-X	25	30.85	24.00	32.00	26.15
FPCe202-R126T-X	26	31.85	25.00	33.00	27.15
FPCe202-R127T-X	27	32.85	26.00	34.00	28.15
FPCe202-R128T-X	28	33.85	27.00	35.00	29.15
FPCe202-R129T-X	29	34.85	28.00	36.00	30.15
FPCe202-R130T-X	30	35.85	29.00	37.00	31.15
FPCe202-R131T-X	31	36.85	30.00	38.00	32.15
FPCe202-R132T-X	32	37.85	31.00	39.00	33.15
FPCe202-R133T-X	33	38.85	32.00	40.00	34.15
FPCe202-R134T-X	34	39.85	33.00	41.00	35.15

TOLERANCES UNLESS OTHERWISE SPECIFIED		SIGNATURES		DATE		MODEL	
±0.25		DRAWN	CONNIE	19/APR/05		FPC CONNECTOR	
CHECKED		SAM		19/APR/05		FPC CONNECTOR	
APPROVALS						FPCe202-Rt--T--	

MMT CORPORATION