
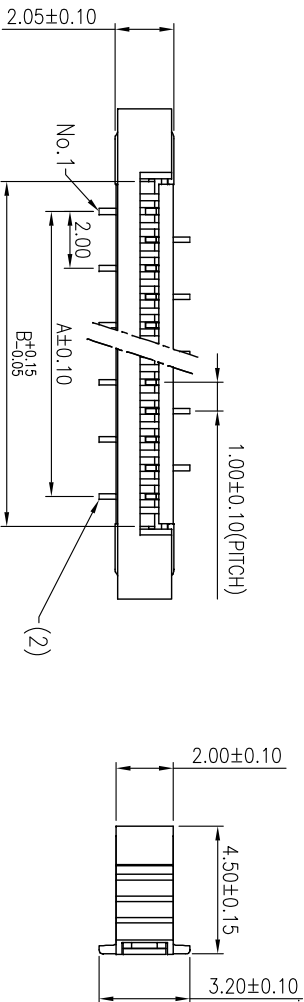
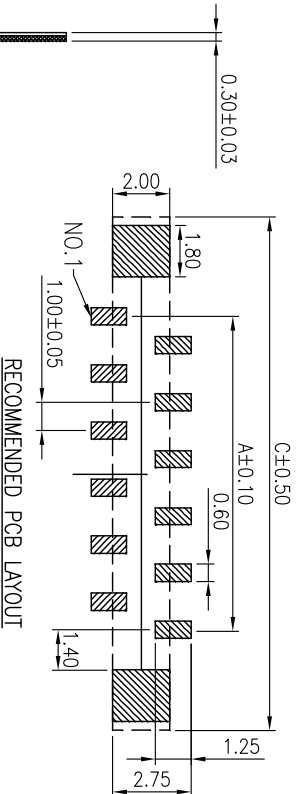



MODEL NO.	NO. of Pins	DIMENSIONS		
		A	B	C
FPCe214-Pt02T	2	1.00	3.10	8.20
FPCe214-Pt03T	3	2.00	4.10	9.20
FPCe214-Pt04T	4	3.00	5.10	10.20
FPCe214-Pt05T	5	4.00	6.10	11.20
FPCe214-Pt06T	6	5.00	7.10	12.20
FPCe214-Pt07T	7	6.00	8.10	13.20
FPCe214-Pt08T	8	7.00	9.10	14.20
FPCe214-Pt09T	9	8.00	10.10	15.20
FPCe214-Pt10T	10	9.00	11.10	16.20
FPCe214-Pt11T	11	10.00	12.10	17.20
FPCe214-Pt12T	12	11.00	13.10	18.20
FPCe214-Pt13T	13	12.00	14.10	19.20
FPCe214-Pt14T	14	13.00	15.10	20.20
FPCe214-Pt15T	15	14.00	16.10	21.20
FPCe214-Pt16T	16	15.00	17.10	22.20
FPCe214-Pt17T	17	16.00	18.10	23.20
FPCe214-Pt18T	18	17.00	19.10	24.20
FPCe214-Pt19T	19	18.00	20.10	25.20

ORDER INFORMATION:
FPCe214-PXXT
FPC: FPC CONNECTOR
e: PITCH=1.00 mm
214: SERIES NO.
Pt: TERMINAL TYPE, SURFACE MOUNT TYPE
XX: NUMBER OF CONTACTS
T: PLATING, TIN PLATING

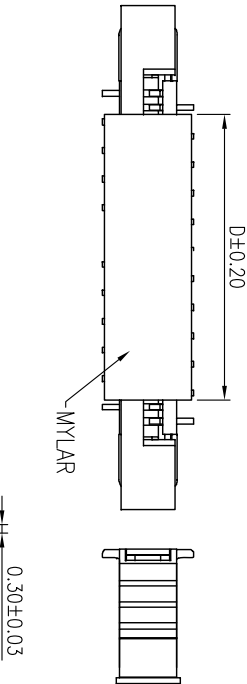

MATERIAL SPECIFICATION:
HOUSING: PA46/LCP, PLASTIC(UL94V-0)
CONTACT: PHOSPHOR BRONZE, TIN PLATING
FITTING NIAL: PHOSPHOR BRONZE, TIN PLATING
ACTUATOR: PPS, PLASTIC(UL94V-0)

ELECTRICAL PERFORMANCE:
RATED VOLTAGE: 50V AC/DC
DIELECTRIC STRENGTH: 500V, AC/MINUTE
INSULATION RESISTANCE: ≥500MΩ
CONTACT RESISTANCE: ≤0.03Ω
TEMPERATURE RANGE: -25°C TO +85°C

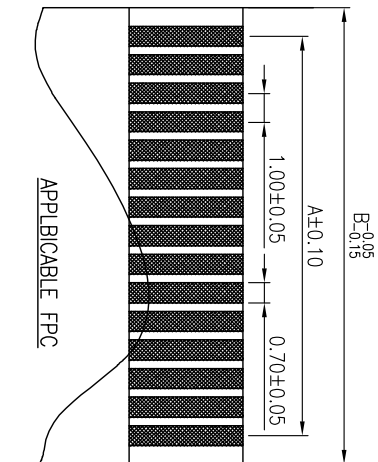

TOLERANCES UNLESS OTHERWISE SPECIFIED		SIGNATURES		DATE	TITLE	MODEL
SYMBOL	UNIT	SCALE	CHECKED			
Δ	mm	4/1	APPROVALS			