
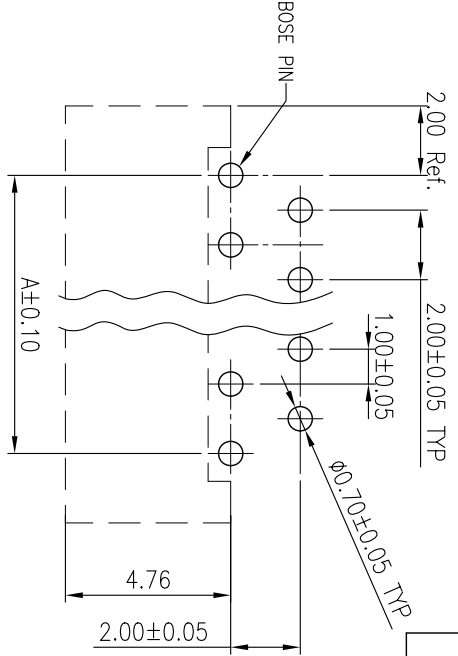
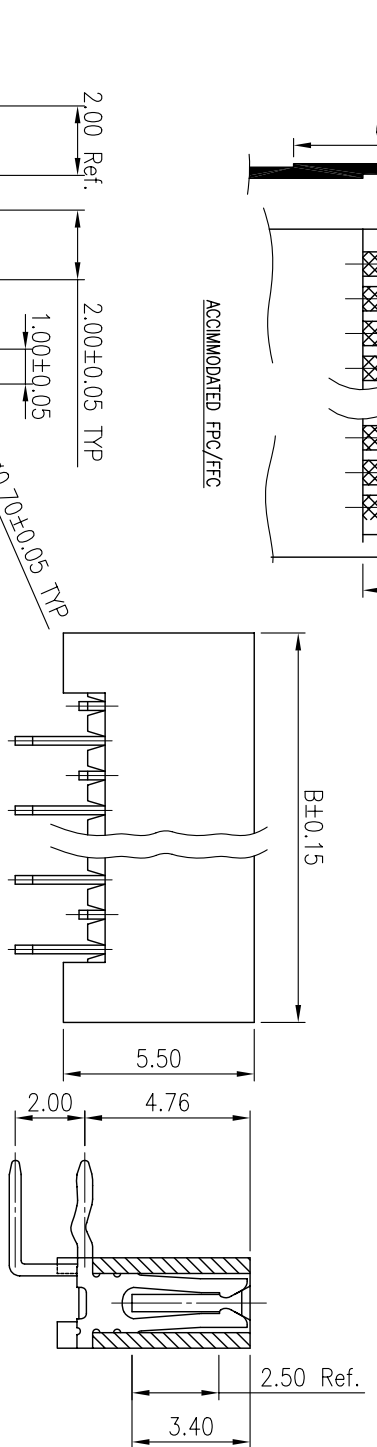


SYMBOL		DESCRIPTION	DATE	APPROVED	DATE	APPROVED
Δ	NOTE	ROHS STANDARD	13/MAY/05	CONNIE	Δ	
Δ					Δ	

**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!

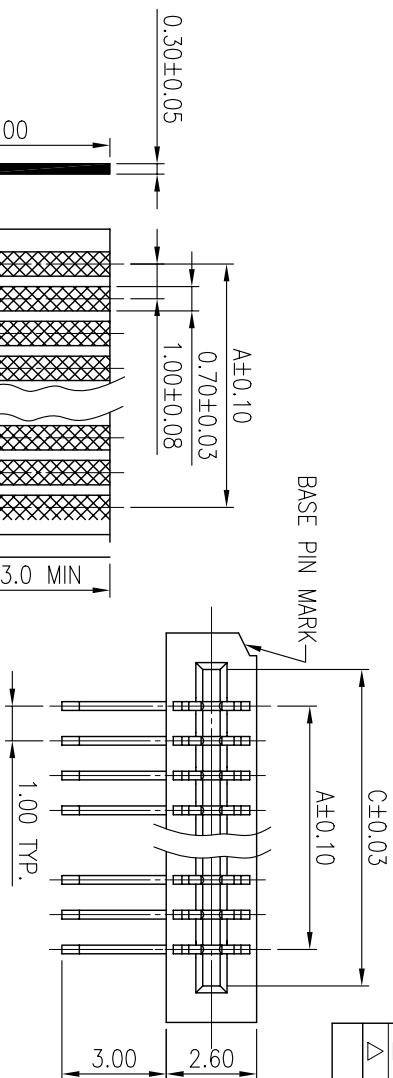

A = 1.00*NO. OF SPACES
B = A + 4.0
C = A + 2.05
* AVAILABLE IN 4 THOUGH 32 CIRCUITS

ORDER INFORMATION:
FPCe501-PxxT-B
FPC: FPC CONNECTOR
e: PITCH = 1.00mm
501: SERIES NO.
Pd: PCB TYPE, RIGHT ANGLE
XX: NO OF CONTACTS
T: TIN PLATING
B: COLOR BROWN

MATERIAL
* BODY: GLASS FILLED NYLON 6T UL E159616
UL 94V-0
* CONTACT: PHOSPHOR BRONZE

MODEL NO.	NO. OF CONTACTS	DIMENSIONS
FPCe501-Pd04T-B	4	A±0.15B±0.20C±0.08
FPCe501-Pd05T-B	5	3.00 6.50 5.15
FPCe501-Pd06T-B	6	4.00 7.50 6.15
FPCe501-Pd07T-B	7	5.00 8.50 7.15
FPCe501-Pd08T-B	8	6.00 9.50 8.15
FPCe501-Pd09T-B	9	7.00 10.50 9.15
FPCe501-Pd10T-B	10	8.00 11.50 10.15
FPCe501-Pd11T-B	11	9.00 12.50 11.15
FPCe501-Pd12T-B	12	10.00 13.50 12.15
FPCe501-Pd13T-B	13	11.00 14.50 13.15
FPCe501-Pd14T-B	14	12.00 15.50 14.15
FPCe501-Pd15T-B	15	13.00 16.50 15.15
FPCe501-Pd16T-B	16	14.00 17.50 16.15
FPCe501-Pd17T-B	17	15.00 18.50 17.15
FPCe501-Pd18T-B	18	16.00 19.50 18.15
FPCe501-Pd19T-B	19	17.00 20.50 19.15
FPCe501-Pd20T-B	20	18.00 21.50 20.15
FPCe501-Pd21T-B	21	19.00 22.50 21.15
FPCe501-Pd22T-B	22	20.00 23.50 22.15
FPCe501-Pd23T-B	23	21.00 24.50 23.15
FPCe501-Pd24T-B	24	22.00 25.50 24.15
FPCe501-Pd25T-B	25	23.00 26.50 25.15
FPCe501-Pd26T-B	26	24.00 27.50 26.15
FPCe501-Pd27T-B	27	25.00 28.50 27.15
FPCe501-Pd28T-B	28	26.00 29.50 28.15
FPCe501-Pd29T-B	29	27.00 30.50 29.15
FPCe501-Pd30T-B	30	28.00 31.50 30.15
FPCe501-Pd31T-B	31	29.00 32.50 31.15
FPCe501-Pd32T-B	32	30.00 33.50 32.15
FPCe501-Pd33T-B	33	31.00 34.50 33.15
FPCe501-Pd34T-B	34	32.00 35.50 34.15
FPCe501-Pd34T-B	34	33.00 36.50 35.15

TOLERANCES UNLESS OTHERWISE SPECIFIED		SIGNATURES		DATE	MODEL
±0.25		DRAWN	CONNIE	03/FEB/05	FPC CONNECTOR
		CHECKED	SAM	03/FEB/05	
		APPROVALS			

MMT CORPORATION