
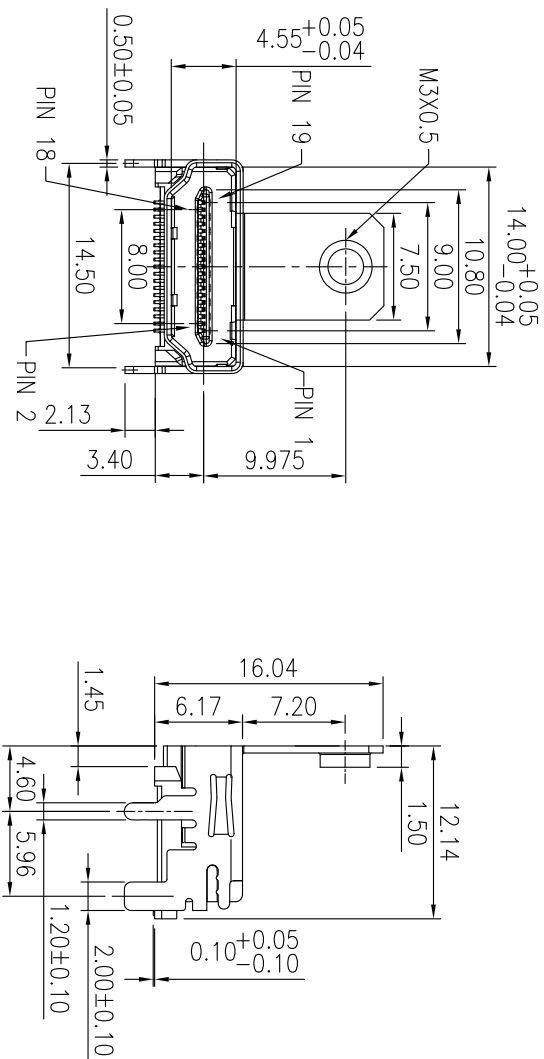
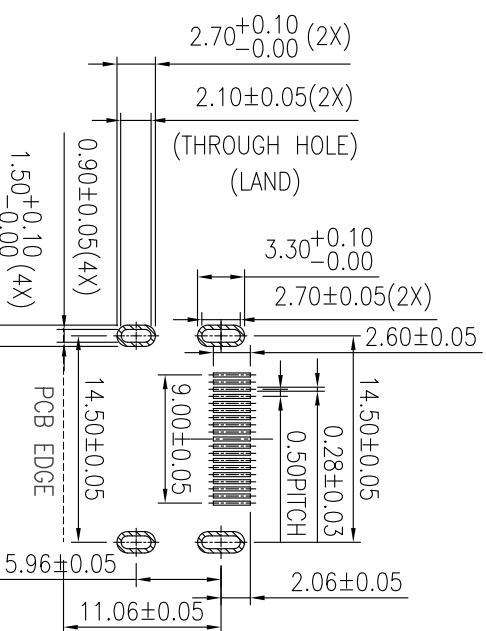



REVISIONS							
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE	APPROVED
△				△			
△				△			

****CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!**

309

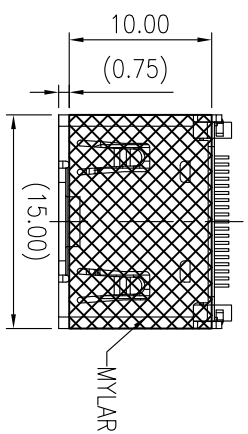

MATERIAL AND FINISH:

1. SHELL MATERIAL: BRASS
2. CONTACT PLATED: 15u" GOLD OVER NICKEL
3. SHELL PLATED: NICKEL PLATED

ELECTRICAL

1. CURRENT RATING: 0.5 AMP MIN.
2. INSULATION RESISTANCE: UNMATED: 100M Ω MIN.
MATED: 10M Ω MIN.

3. CONTACT RESISTANCE: 30mΩ MAX.
4. DIELECTRIC WITHSTANDING VOLTAGE: 300V AC
5. OPERATION TEMPERATURE: -25°C TO +85°C
6. VOLTAGE RATING: 40V AC(RMS)
7. WITHSTANDING VOLTAGE:

500VOLTS AC BETWEEN ADJACENT TERMINAL(UNMATE)
300VOLTS AC BETWEEN ADJACENT TERMINAL(MATE)

300VOLTS AC BETWEEN ADJACENT TERMINAL(MATE)

TOLERANCES UNLESS OTHERWISE SPECIFIED		SIGNATURES		DATE	MODEL
±0.25		DRAWN	SAM	29/MAR/13	TITLE
		CHECKED	AARON	29/MAR/13	HDMI CONNECTOR
SYMBOL	UNIT	SCALE	APPROVALS		NO.
	mm	2/1			HDMI002-R19G15t

MMT CORPORATION

ORDER INFORMATION:
HDM1002-Rt19Cft
HDMI: HDMI CONNECTOR
002: SERIES NO.
Rt: PCB TYPE, RIGHT ANGLE SURFACE MOUNT
19: NO. OF CONTACTS, 19 PINS
G15t: 15u" GOLD ON CONTACT,
TIN PLATED ON SOLDER TAIL