

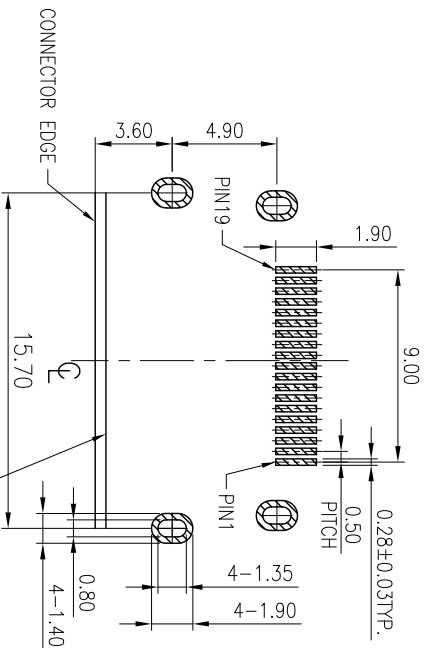
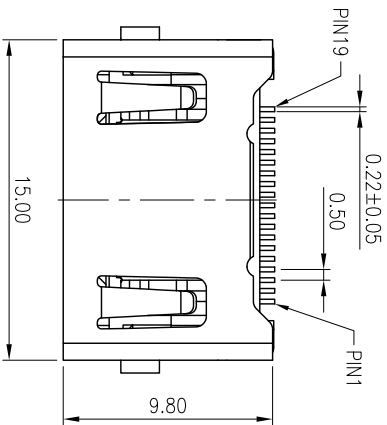


REVISIONS					
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION
Δ				Δ	
Δ				Δ	
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!					511




RECOMMENDED PCB LAYOUT (TOP VIEW)
TOLERANCE: ±0.05mm

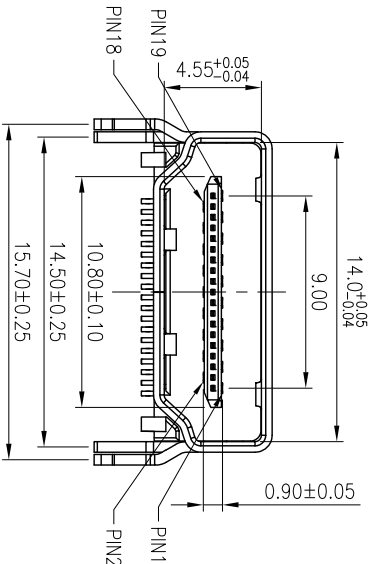

SPECIFICATIONS
ELECTRICAL CHARACTERISTICS
CURRENT RATING: 0.5 AMP
VOLTAGE RATING: 40 V
CONTACT RESISTANCE: 30mΩ MAX
INSULATION RESISTANCE: 100MΩ MIN.@500V DC
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE

MECHANICAL CHARACTERISTICS
INSERTION FORCE: 4.5KGF MAX.
WITHDRAWING FORCE: 1KGF ~ 4KGF.
LIFE TEST: 10000 CYCLES
OPERATING TEMPERATURE: -25°C TO +85°C

ORDER INFORMATION:
HDM1009-Rt19Gt-TR
HDMI: HDMI CONNECTOR
009: SERIES NO.
R: PCB TYPE, R/A SURFACE MOUNT
19: NO. OF CONTACTS
Gt: GOLD FLASH ON CONTACTS, TIN PLATED ON SOLDER TAILS
TR: PACKING TYPE, TAPE & REEL



3	SHELL	1	C2680R-H NI 50U" T=0.5mm PLATING ALL OVER
2	TERMINAL	19	C2680R-H SEE PART NO.
1	HOUSING	1	LCP E130I UL94V-0 BLACK
NO	PART NAME	QTY	MATERIAL PLATING & COLOR
TOLERANCES UNLESS OTHERWISE SPECIFIED		SIGNATURES	
±0.15		DRAWN	DATE
AARON		12/MAR/19'	TITLE
HDMI CONNECTOR		CHECKED	AMIE
12/MAR/19'		APPROVALS	NO.
HDM1009-Rt19Gt-TR		MODEL	

MMT CORPORATION