
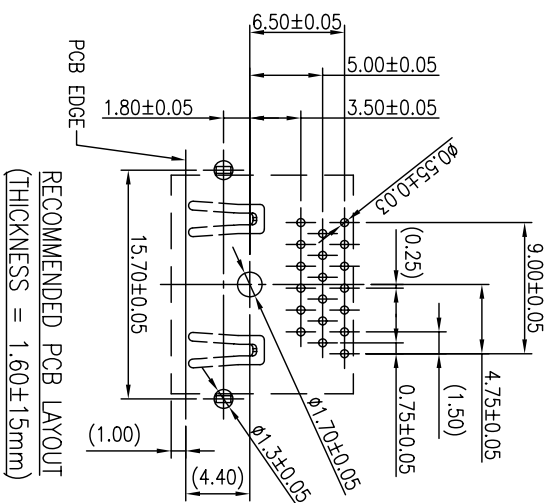
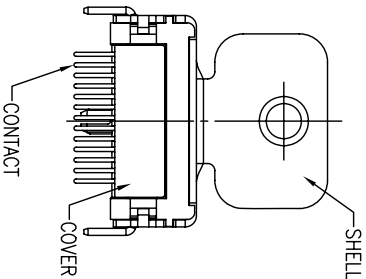
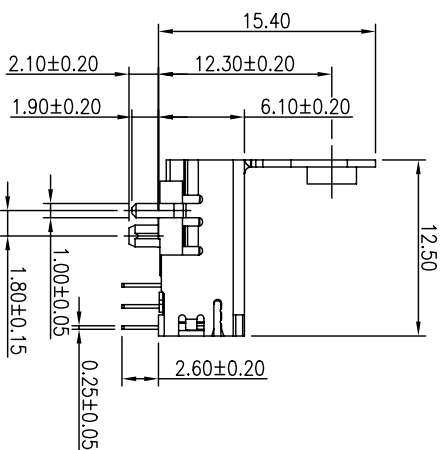
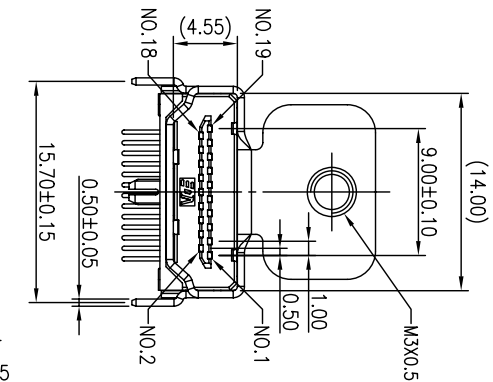


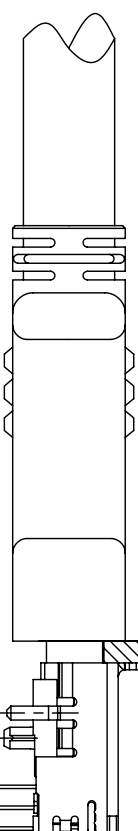



RECOMMENDED PCB LAYOUT
(THICKNESS = 1.60±15mm)

PIN ASSIGNMENT

MATERIAL:
HOUSING: HIGH TEMPERATURE
THERMOPLASTIC UL 94V-0 RATED
COVER: HIGH TEMPERATURE
THERMOPLASTIC UL 94V-0
CONTACT: COPPER ALLOY

ORDER INFORMATION:
HDMI012-P019GX
HDMI: HDMI CONNECTOR
012: SERIES NO.
Pa: PCB TYPE, RIGHT ANGLE TYPE
19: 19 OF CONTACTS
GX: CONTACT PLATING OPTION
Gft: GOLD FLASH ON CONTACT,
TIN PLATED ON SOLDER TAIL
G15t: 15u" GOLD ON CONTACT,
TIN PLATED ON SOLDER TAIL
G30t: 30u" GOLD ON CONTACT,
TIN PLATED ONSOLDER TAIL

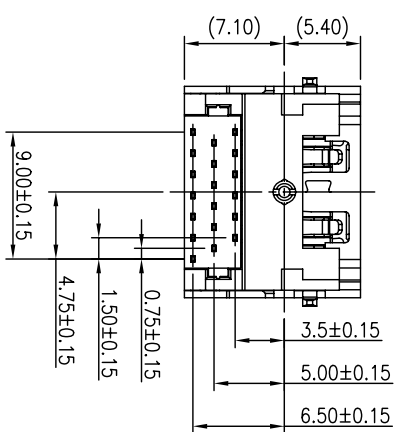

REFERENCE MOUNT DIMENSION

REVISIONS					
SYM	DESCRIPTION	DATE	APPROVED	SYM	DATE
Δ				Δ	
Δ				Δ	
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!					217

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.25			SIGNATURES		DATE	MODEL
DRAWN			KEN		25/APR/06	HDMI CONNECTOR
CHECKED			AARON		25/APR/06	
APPROVALS						HDMI012-P019G_

MMT CORPORATION