

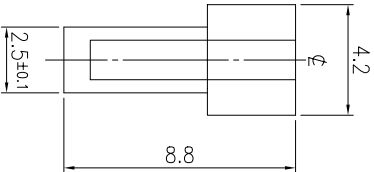
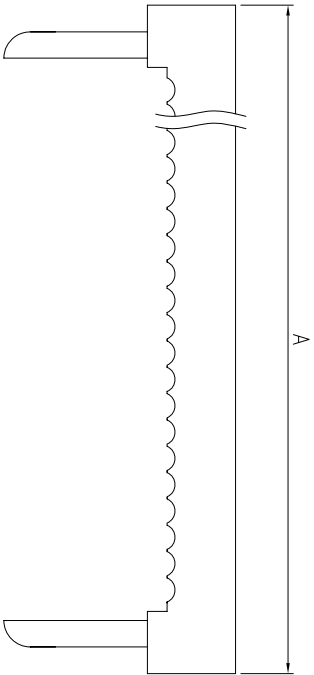


REVISIONS					
SYM	DISCRPTION	DATE	APPROVED	SYM	DISCRPTION
△				△	
△				△	




MATERIAL :
INSULATOR : PBT+30% GLASS FIBER(Ul94V-0)
CONTACT : PHOSPHOR BRONZE OR BRASS
CONTACT PLATED : GOLD OR TIN OVER NICKEL.

ELECTRICAL CHARACTERISTICS :
CURRENT RATING : 1 A.
WITHSTANDING VOLTAGE : AC 500V r.m.s.
INSULATION RESISTANCE : 1000MΩ MIN. AT DC 500V.
CONTACT RESISTANCE : 15mΩ MAX.
OPERATING TEMPERATURE: -40°C~+105°C.

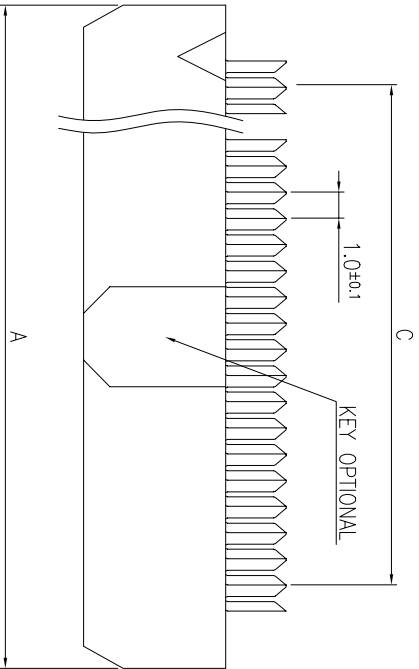

MODEL NO.	POSITION	A	B	C
IDCb405-F1002Gft	10	15.2	8.0	9.0
IDCb405-F1202Gft	12	17.2	10.0	11.0
IDCb405-F1402Gft	14	19.2	12.0	13.0
IDCb405-F1602Gft	16	21.2	14.0	15.0
IDCb405-F1802Gft	18	23.2	16.0	17.0
IDCb405-F2002Gft	20	25.2	18.0	19.0
IDCb405-F2402Gft	24	29.2	22.0	23.0
IDCb405-F2602Gft	26	31.2	24.0	25.0
IDCb405-F3002Gft	30	35.2	28.0	29.0
IDCb405-F3402Gft	34	39.2	32.0	33.0
IDCb405-F3602Gft	36	41.2	34.0	35.0
IDCb405-F4002Gft	40	45.2	38.0	39.0
IDCb405-F4402Gft	44	49.2	42.0	43.0
IDCb405-F5002Gft	50	55.2	48.0	49.0
IDCb405-F6002Gft	60	65.2	58.0	59.0

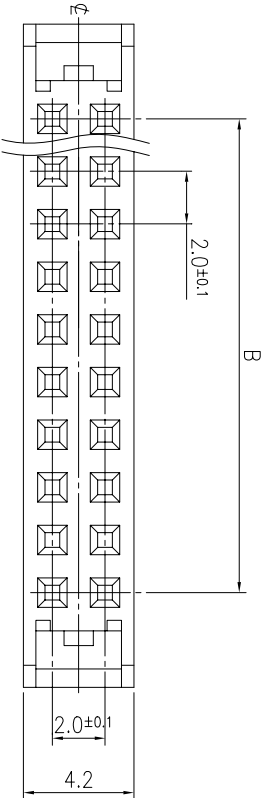

TOLERANCES UNLESS OTHERWISE SPECIFIED			SIGNATURES		DATE	MODEL
5/1			DRAWN			TITLE
CHECKED						IDC SOCKET
APPROVALS						NO.
IDCb405-F__02Gft						

MMT CORPORATION

TEL: (510) 979-2188

info@mmt-us.com

FAX: (510) 979-2189