
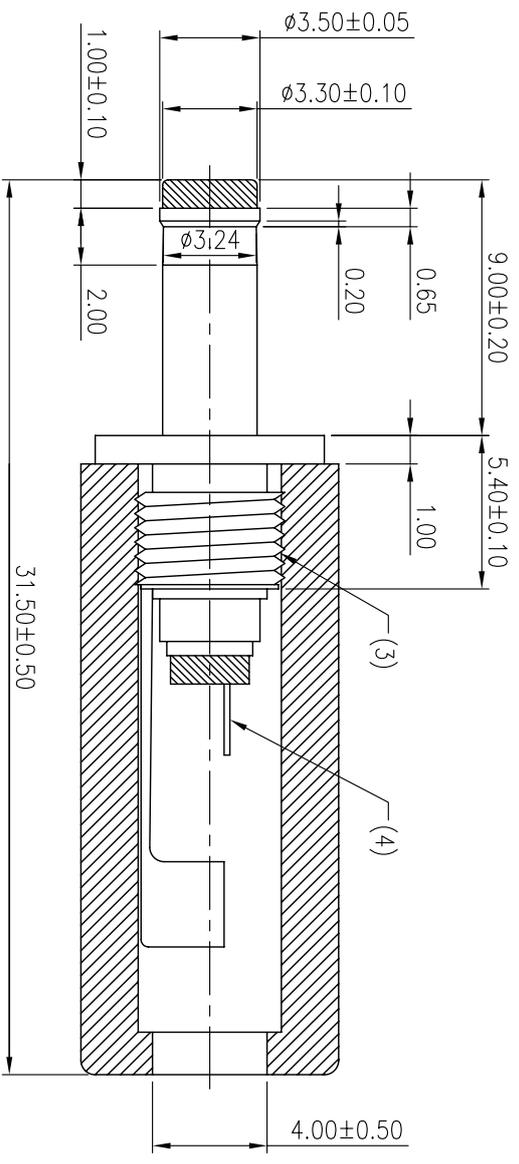

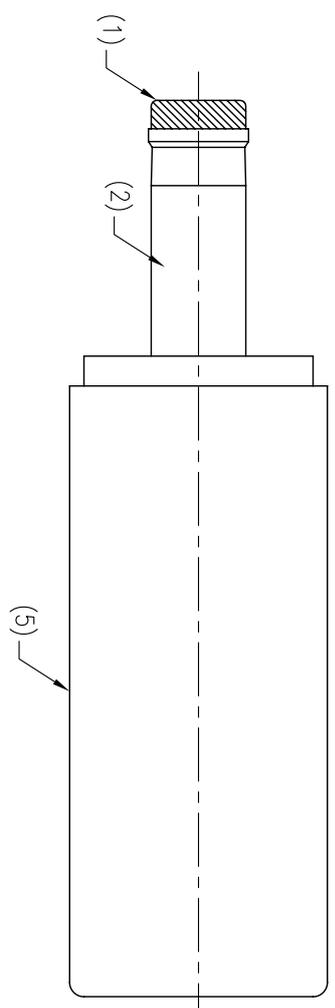


8 7 6 5 4 3 2 1  
 VI.1 NOTE: THIS DEVICE IS ROHS COMPLIANT.

		REVISIONS					
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE	APPROVED
Δ				Δ			
Δ				Δ			
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!							117

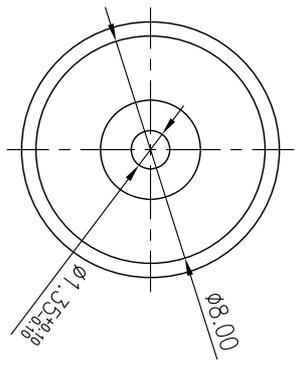

SPECIFICATIONS:  
 CONTACT RESISTANCE: 30mΩ MAX.  
 INSULATION RESISTANCE: 100MΩ MIN. AT DC 500V  
 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V FOR ONE MINUTE

NO	DESCRIPTION	MATERIAL	QTY	FINISH
5	HOUSING	ABS	1	BLACK COLOR
4	GROUND TERMINAL	P-BRONZE	1	NICKEL PLATED
3	OUTER SLEEVE	BRASS	1	NICKEL PLATED
2	INNER BARREL	BRASS	1	NICKEL PLATED
1	INSULATOR RING	POM	1	BALCK COLOR

TOLERANCES UNLESS OTHERWISE SPECIFIED		SIGNATURES		DATE		MODEL	
SYMBOL	UNIT	SCALE	CHECKED	APPROVALS	NO.	TITLE	
Δ	mm	4/1	JOAN			DC POWER PLUG	
						JK003-PLUG	

MMT CORPORATION