

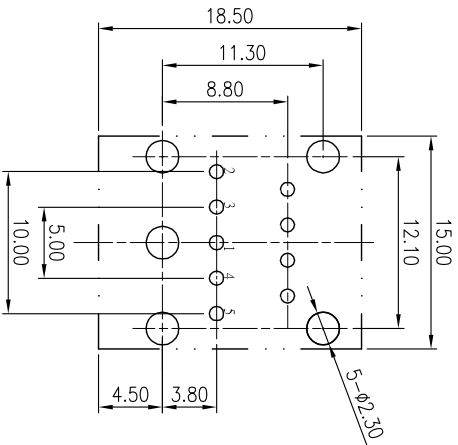
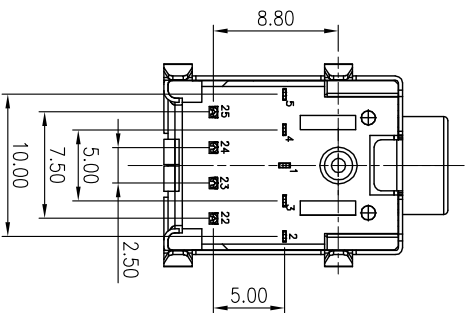
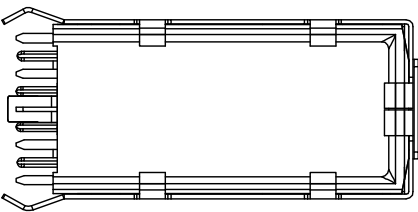
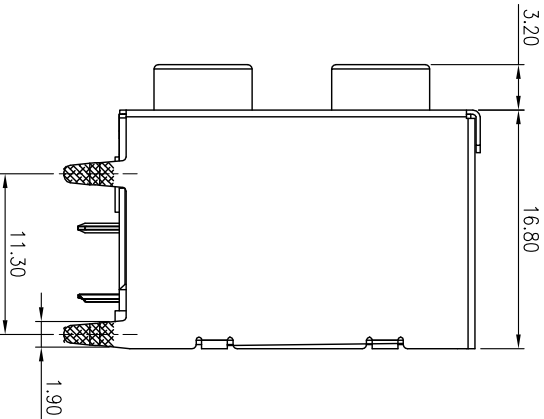


SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE	APPROVED
Δ				Δ			
Δ				Δ			
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!							052

ITEM	NAME	MATERIAL	FINISH	QTY
1	SLEEVE TERMINAL	COPPER ALLOY	GOLD PLATING & TIN PLATED & NICKEL PLATED	1
2	RING TERMINAL	COPPER ALLOY	GOLD PLATING & TIN PLATED & NICKEL PLATED	1
3	RS TERMINAL	COPPER ALLOY	GOLD PLATING & TIN PLATED & NICKEL PLATED	1
4	TS TERMINAL	COPPER ALLOY	GOLD PLATING & TIN PLATED & NICKEL PLATED	1
5	TP TERMINAL	COPPER ALLOY	GOLD PLATING & TIN PLATED & NICKEL PLATED	1
6	2-RING TERMINAL	COPPER ALLOY	GOLD PLATING & TIN PLATED & NICKEL PLATED	1
7	2-RS TERMINAL	COPPER ALLOY	GOLD PLATING & TIN PLATED & NICKEL PLATED	1
8	2-TS TERMINAL	COPPER ALLOY	GOLD PLATING & TIN PLATED & NICKEL PLATED	
9	2-TIP TERMINAL	COPPER ALLOY	GOLD PLATING & TIN PLATED & NICKEL PLATED	
10	SHIELD	SPCC	BRIGHT TIN PLATED COVER NICKEL PLATED	
11	COVER	LCF+30%G.F. U194V-0	BLACK	
12	HOUSING	PB1+30%G.F. U194V-0	BLACK	
13	PLASTIC BUSHING	PA66+15%G.F. U194V-0		

1. CURRENT RATING: 1.0 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC R.M.S. FOR ONE MINUTE
3. INSULATION RESISTANCE: 100M Ω MIN. AT 500V DC.
4. CONTACT RESISTANCE: 50m Ω MAX.
5. OPERATING TEMPERATURE: -25°C TO +85°C.
6. DURABILITY: 5000 CYCLES.
7. MATING FORCE: 5.0kg MAX.
8. UNMATING FORCE: 0.4~3.0kg
9. MAX PROCESSING TEMPERATURE: 230°C FOR 30~60 SECONDS.

(HI-TEMP. PLASTIC)

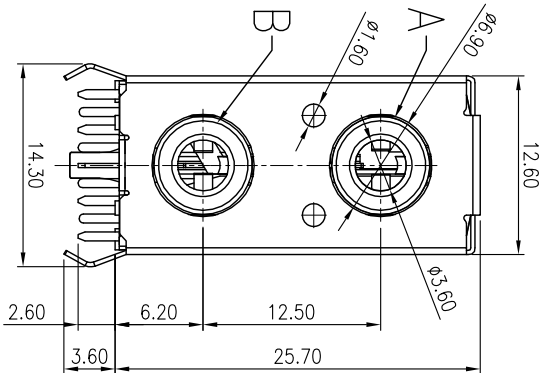

PART NO.	COLOR INDEX	
	HOUSING A	HOUSING B
JP007A-Pq2B3FB-60	GREEN	PINK
JP007A-Pq2B3FB-99	GRAY 2C	GRAY 2C
JP007A-Pq2B3FB-26	BLUE	GREEN

TOLERANCES UNLESS OTHERWISE SPECIFIED		SIGNATURES		DATE	MODEL
±0.30		DRAWN	AARON	05/SEP/17	TITLE
		CHECKED	DIANA	05/SEP/17	PHONE JACK
SYMBOL		UNIT	SCALE	APPROVALS	NO.
△	mm	2/1			JP007A-Pd2B3EB----

MMT CORPORATION

TEL: (510) 979-2188 www.mmtmachrone.com FAX: (510) 979-2189