


SYM	DISCRPTION	DATE	APPROVED	SYM	DISCRPTION	DATE	APPROVED
Δ				Δ			
Δ				Δ			
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!							008

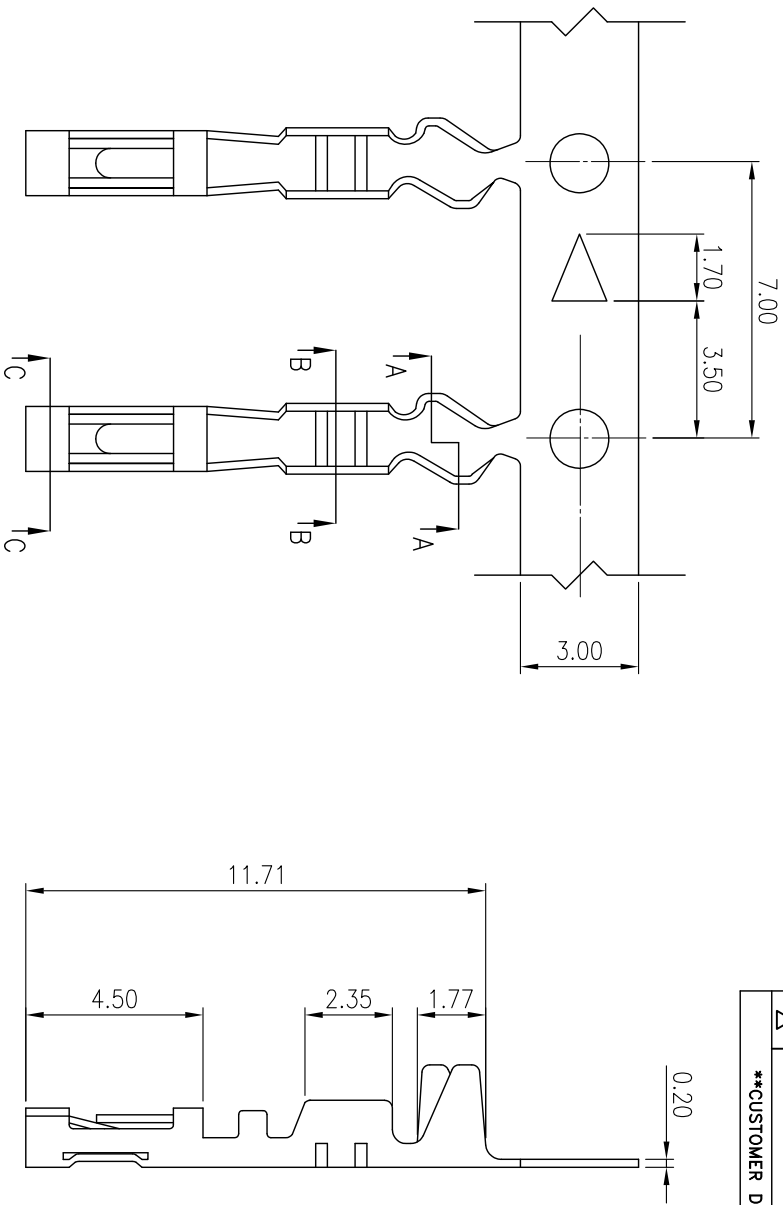


SPECIFICATIONS:

VOLTAGE: 125V AC/DC
CURRENT RATING: 3A AC/DC
WITHSTANDING VOLTAGE: 1000V AC/MINUTE
INSULATION RESISTANCE: 1000MΩ MAX.
TEMPERATURE RANGE: -40°C ~ +105°C
CONTACT RESISTANCE: 20mΩ MAX.

TERMINAL:
APPLICABLE WIRES: AWG# 22-28
MATERIAL: BRASS
FINISH: GOLD PLATED; TIN PLATED
THICKNESS: 0.2mm
Q'TY: 10000 PCS./REEL

ORDER INFORMATION:

MCa021-TX
MC: WAFER SERIES
a: MATING HOUSING
PITCH: 2.54 mm
021: SERIES NO.
T: TERMINAL
X: G: GOLD PLATING
BLANK: TIN PLATING

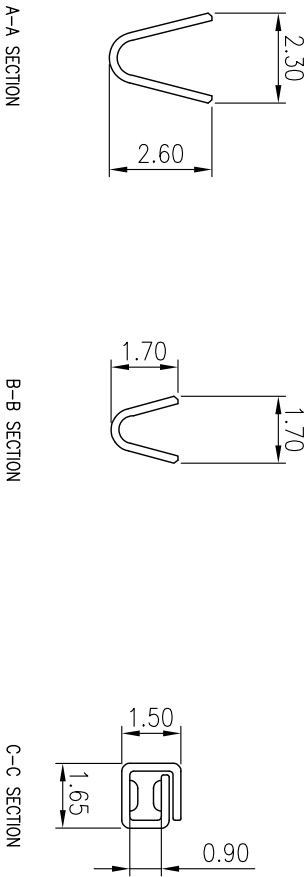

MATING		HOUSING		MCa021-XX02-H	
TOLERANCES UNLESS OTHERWISE SPECIFIED		SIGNATURES		DATE	
±0.30		DRAWN PING		30/NOV/17	
CHECKED AARON		30/NOV/17		NO.	
APPROVALS		MODEL		MCa021-TX	

MMT CORPORATION