
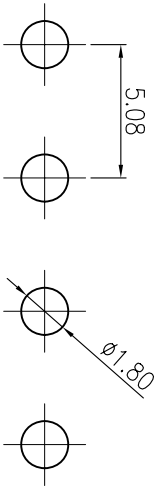


VI.1 NOTE: THIS DEVICE IS ROHS COMPLIANT.

4		3		2		1	
SYM		DISCRPTION		DATE		APPROVED	
Δ	NOTE ROHS	STANDARD	27/FEB/06'	AARON	Δ		
Δ					Δ		

**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!

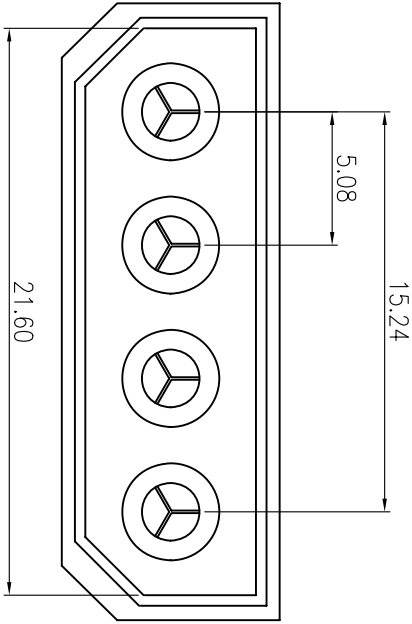

PCB LAYOUT



ORDER INFORMATION:

MCp002-P04T
MC: WAFER SERIES, WAFER
p: PITCH: 5.08 mm
002: SERIES NO.
P: PCB TYPE, STRAIGH TYPE
04: 4 OF CONTACTS
T: PLATING, TIN PLATING

SPECIFICATIONS

VOLTAGE RATING : 250V AC/DC
CURRENT RATING : 7A AC / DC
WITHSTANDING VOLTAGE : 1500V AC/MINUTE
INSULATION RESISTANCE : 1000 MOHM min
TEMPERATURE RANGE : -25°C ~ +85°C
APPLICABLE PC BOARD THICKNESS : 1.6mm
CONTACT RESISTANCE: INITIAL VALUE / 10 MOHM MAX.
AFTER ENVIRONMENTAL TESTING / 20 MOHM MAX.

MATERIAL : NYLON 66 UL 94-V2

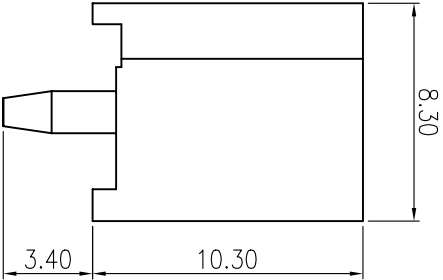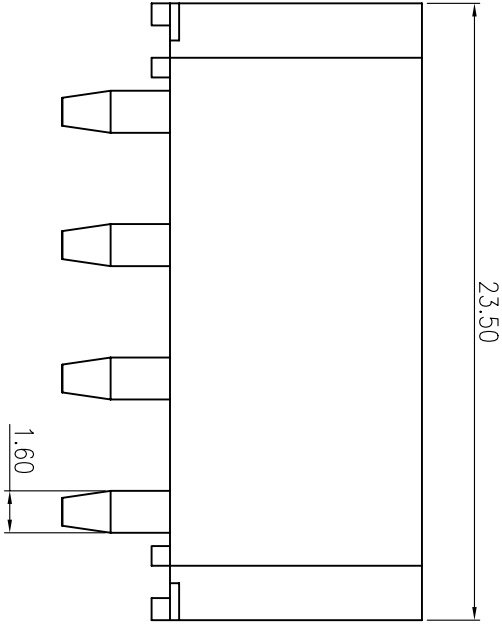

MATING		HOUSING		TERMINAL		MODEL	
TOLERANCES UNLESS OTHERWISE SPECIFIED		SIGNATURES		DATE		TITLE	
±0.30		DRAWN	TONY	19/AUG/03"		WAFER	
CHECKED	ZOLA	19/AUG/03"					
SYMBOL	UNIT	SCALE	APPROVALS				
Δ	mm	5/1					

MMT CORPORATION

