



SYM		REVISIONS				DATE		APPROVED	
		DESCRIPTION	DATE	APPROVED	SYM				
Δ					Δ				
Δ					Δ				
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!									052

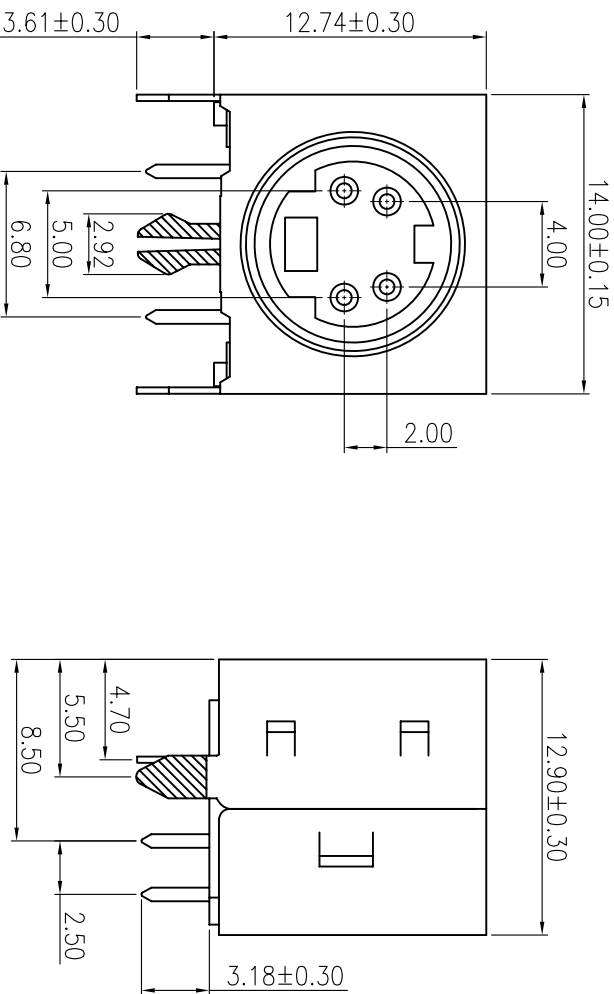

MATERIAL
INSULATOR: PBT UL94V-0
CONTACT: BRASS, GOLD/TIN PLATED
SHELL: BRASS, TIN PLATED
ENVIRONMENTAL
OPERATING TEMPERATURE: -55°C~105°C
ELECTRICAL
CONTACT CURRENT RATING: 1 AMP
DIELECTRIC WITHSTANDING: AC 500V/MIN. R.M.S
INSULATION RESISTANCE: 500M OHMS MIN.
CONTACT RESISTANCE: 30m OHMS MAX.

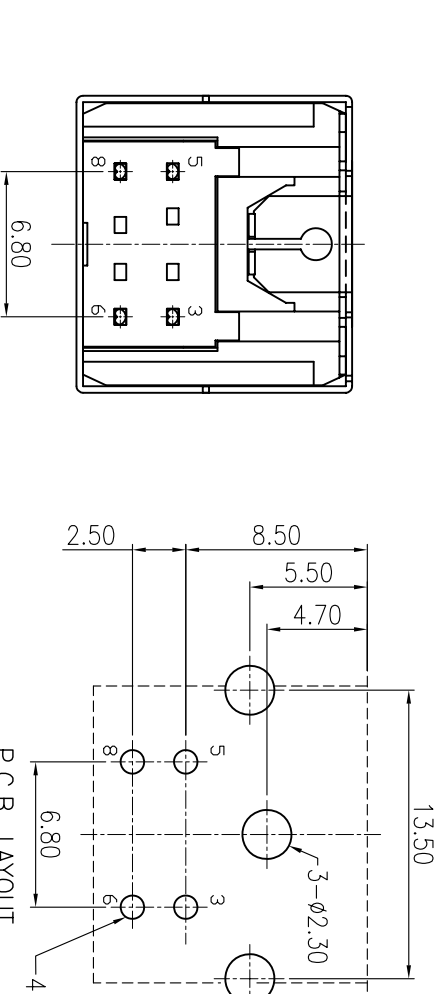

ORDER INFORMATION
MD000-Pd04TGft
MD: MINI DIN JACK
000: SERIES NO.
Pd: PCB TYPE, RIGHT ANGLE
04: NO. OF CONTACTS
T: SHELL PLATING,
-T: TIN PLATED
Gft: TERMINAL PLATING,
GOLD PLATING ON CONTACT,
TIN PLATING ON SOLDER TAIL

P.C.B. LAYOUT
BOTTOM VIEW

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.30			SIGNATURES		DATE	MODEL	
			DRAWN	AARON	29/DEC/08	TITLE	
SYMBOL	UNIT	SCALE	CHECKED	WENDY	29/DEC/08	NO.	MD000-Pd04TGft
			APPROVALS				