

VI.1 NOTE: THIS DEVICE IS ROHS COMPLIANT.

59.80

52.07

A


8.00

7.84

2.60±0.30

REVISIONS							
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE	APPROVED
△				△			
△				△			
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!						020	

DIM.L

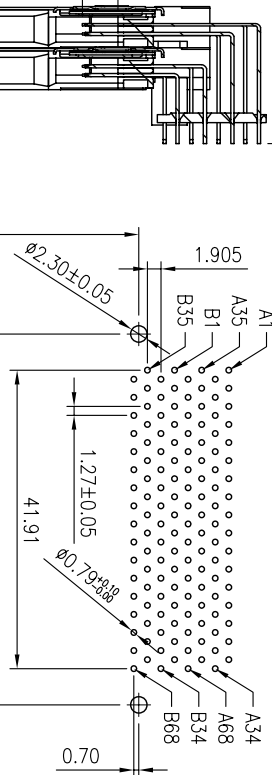

ORDER INFORMATION:

PCM008-P66802XXXGt-XX

PCM: PCMCIA CARD CONNECTOR

008: SERIES NO.

68: 68 PINS

02: 2 LAYERS

X: CARD WORKING VOLTAGE OPTION

3: 3.3V

5: 5V

XX: STANDARD OFF OPTION

10: DIM.H=1.00mm

20: DIM.H=2.00mm

50: DIM.H=5.00mm

55: DIM.H=5.50mm

Gt: GOLD FLASH ON CONTACT, TIN

PLATED ON SOLDER TAIL

XX: EJECTOR DIRECTION OPTION

RE: RIGHT SIDE

LE: LEFT SIDE

PCB LAYOUT: COMPONENT SIDE



6.20

51.00 MIN.

59.00

A

9.45

5.00

107.00

85.50

64.50

5.75±0.15

A

B

C

D

8

7

6

5

4

3

2

1

PIN TYPE	DIM.L±0.20	PIN NUMBER
DETECT	3.50mm	A36,A67,B36,B67
GENERAL	4.25mm	THE REST
POWER	5.00mm	A1,A17,A34,A35,A51,A68 B1,B17,B34,B35,B51,B68

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.25				SIGNATURES		DATE	MODEL
				DRAWN	KEN	13/SEP/07	PCMCIA CARD CONNECTOR
				CHECKED	PEARLIE	13/SEP/07	
				APPROVALS			
SYMBOL	UNIT	SCALE		NO.			
△	mm	1/1		PCM008-P66802-___Gt-___			

MMT CORPORATION

TEL:(510)979-2188

www.mmtmachine.com

FAX:(510)979-2189