
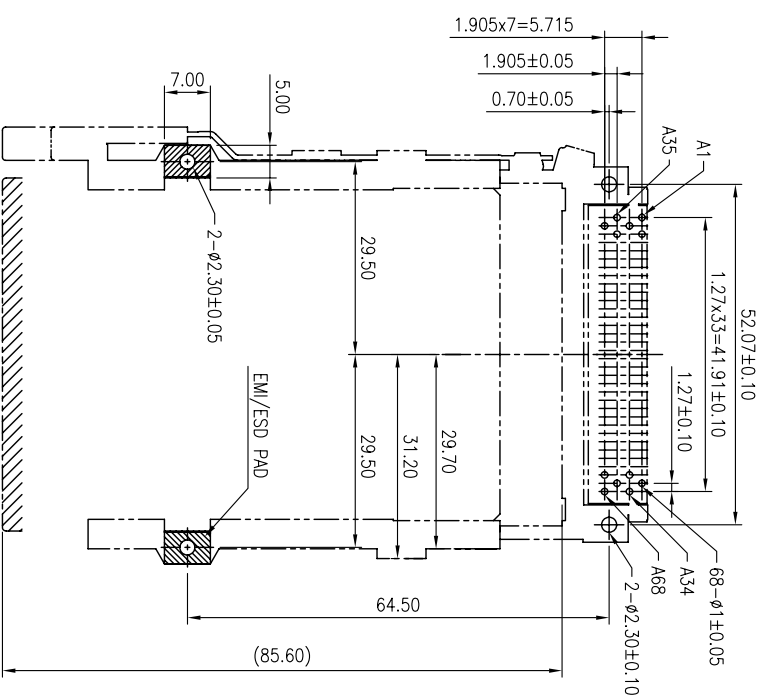
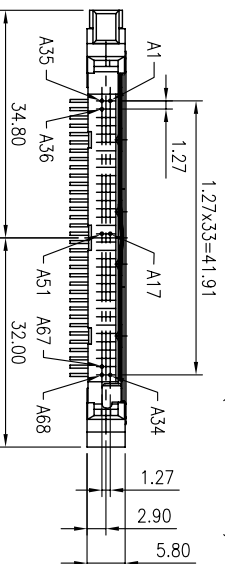


8 7 6 5 4 3 2 1

VI.1 NOTE: THIS DEVICE IS ROHS COMPLIANT.

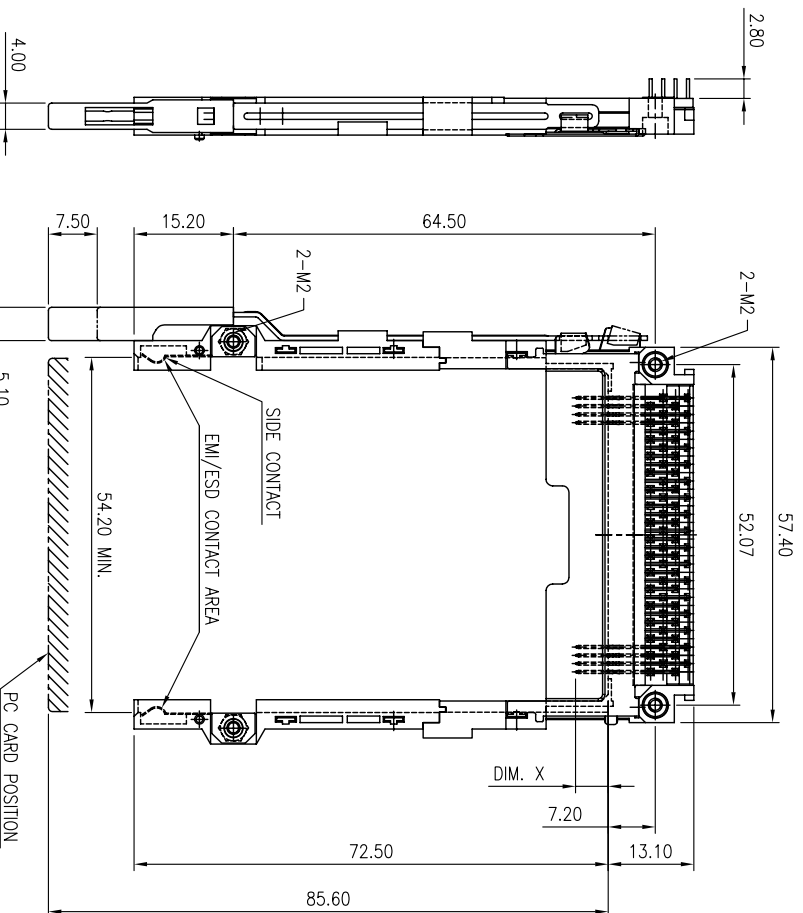

RECOMMENDED PCB LAYOUT

- NOTE:
1. MATERIAL:
 - (A) HEADER: THERMOPLASTIC GLASS FIBER FILLED, UL94V-0, BLACK
 - PIN: COPPER ALLOY
 - (B) EJECT MECHANISM
- EJECT & PLATE: STEEL
- PUSH BUTTOM: THERMOPLASTIC, UL94V-0, BLACK

2. DIMENSION "X"
- X=5.00mm : PIN NO. 1, 17, 34, 35, 51, 68
- X=3.50mm : PIN NO. 36, 67
- X=4.25mm : OTHER

REVISIONS					
SYM	DISCRPTION	DATE	APPROVED	SYM	DISCRPTION
Δ			Δ		
Δ			Δ		
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!					303

ORDER INFORMATION

PCM010-Pd6830Gt-LE

010: SERIES NUMBER

Pg: RIGHT ANGLE

68: 68 PINS

3: FOR CARD WORKING VOLTAGE, 3.3V

0: STAND OFF 0.0mm

Gt: GOLD FLASH ON CONTACT TIN PLATING ON SOLDER TAIL

LE: EJECTOR DIRECTION, LEFT SIDE

TOLERANCES UNLESS OTHERWISE SPECIFIED			SIGNATURES		DATE		MODEL	
±0.30			DRAWN	AARON	23/JUN/09		PCM010 CONNECTOR	
SYMBOL	UNIT	SCALE	CHECKED	PEGGY	23/JUN/09		NO.	
Δ	mm	1/1	APPROVALS		PCM010-Pd6830Gt-LE			

MMT CORPORATION

MMT CORPORATION

TEL:(510)979-2188

www.mmtmachrone.com

FAX:(510)979-2189