

VI.1 NOTE: THIS DEVICE IS ROHS COMPLIANT.

59.80

52.07

A

2.12

90.00

83.50

64.50

A

6.20

59.00

51.00 MIN

12.05

5.80

2.65

1.27

4.00

41.91

#35

#34

#68

#1

2.65

1.27

4.00

41.91

#35

#34

#68

#1

2.65

1.27

4.00

41.91

#35

#34

#68

#1

2.65

1.27

4.00

41.91

#35


#34

#68

#1

REVISIONS				2	1
SYM	DISCRIPTION	DATE	APPROVED	SYM	DATE
Δ				Δ	
Δ				Δ	
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!					020

ORDER INFORMATION
PCM011-Pd683XGt-RE
011: SERIES NUMBER
Pd: RIGHT ANGLE
68: 68 PINS
3: FOR CARD WORKING VOLTAGE
-3: 3.3V
X: STAND OFF OPTION (DIM A)
-5: 5.0mm, -7: 8.0mm
Gft: GOLD FLASH ON CONTACT,
TIN PLATING ON SOLDER TAIL
RE: EJECTOR DIRECTION
-RE: RIGHT SIDE

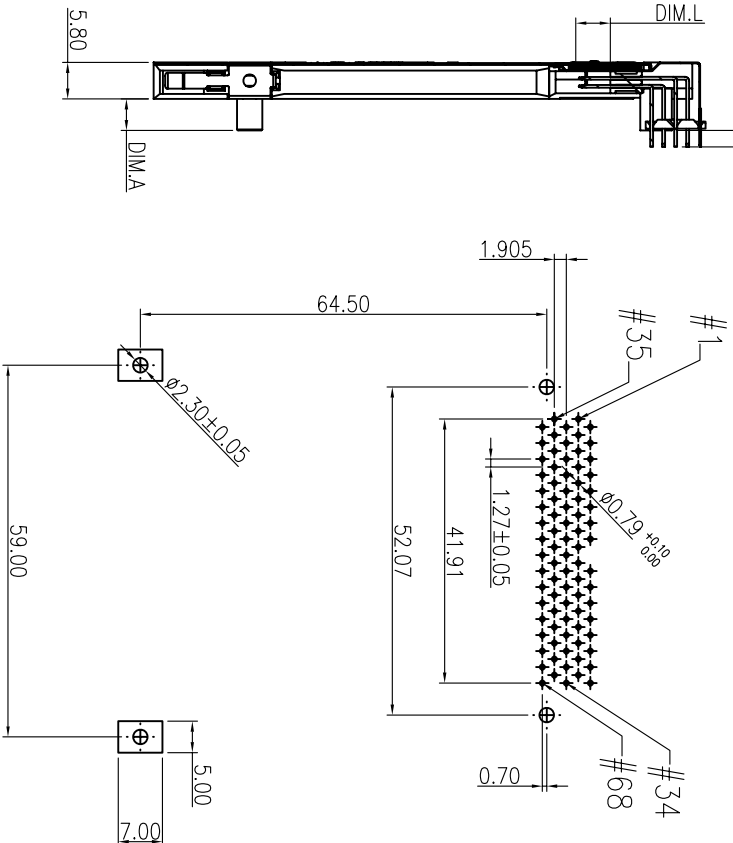

PIN TYPE	DIM.L	PIN NUMBER
DETECT	3.50mm	36,37
GENERAL	4.25mm	ALL OTHER PINS
POWER	5.00mm	1,17,34,35,51,68

TOLERANCES UNLESS OTHERWISE SPECIFIED				SIGNATURES		DATE	MODEL
±0.25				DRAWN	SNOW	08/JAN/07	PCM011-Pd683XGt-RE
CHECKED				KEN		08/JAN/07	
APPROVALS							
NO.				PCM011-Pd683XGt-RE			

MMT CORPORATION