
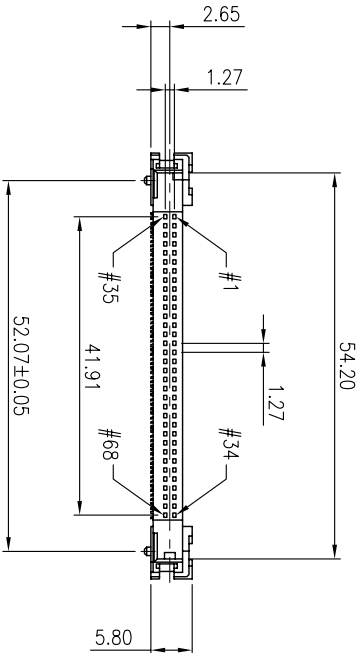
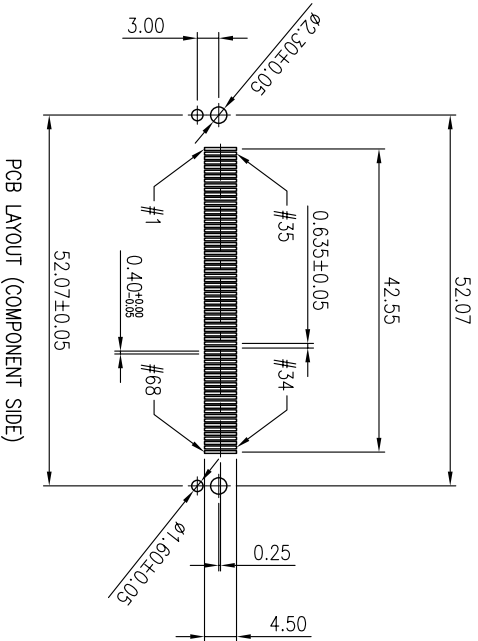



REVISIONS					
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION
Δ				Δ	
Δ				Δ	
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!					020

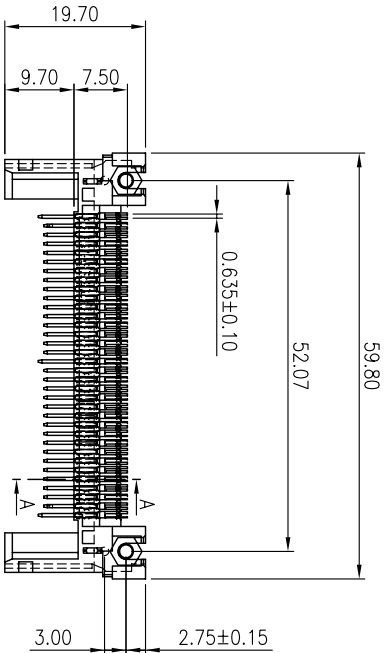

ELECTRIC:

VOLTAGE: AC 35V/PIN

CURRENT: 0.5A

CONTACT RESISTANCE: 40mΩ MAX.

INSULATION RESISTANCE: 100MΩ MIN.

DIELECTRIC WITHSTANDING VOLTAGE: 0.5mA MAX.

OPERATING TEMPERATURE RANGE: -30°C ~ +80°C

ORDER INFORMATION:

PCM012-Rt6830Gft

PCM: PCMCIA CONNECTOR

012: SERIES NO.

Rt: PCB TYPE, R/A SMT

68: NO. OF PINS

3: FOR CARD WORKING VOLTAGE, 3.3V

0: STAND OFF, 0.00mm

Gft: CONTACT PLATING, GOLD FLASH ON CONTACTS

& TIN PLATED ON SOLDER TAILS

MATERIAL:

CONTACT: COPPER ALLOY

INSULATOR: LCP, UL94V-0, BLACK

PIN TYPE	DIM.L±0.20	PIN NO.
DETECT	3.50mm	36, 67
GENERAL	4.25mm	THE REST
POWER	5.00mm	1, 17, 34, 35, 51, 68

TOLERANCES UNLESS OTHERWISE SPECIFIED			SIGNATURES		DATE	MODEL
±0.25			DRAWN	KEN	25/JUN/08	TITLE
			CHECKED	WENDY	25/JUN/08	PRODUCT TYPE
SYMBOL	UNIT	SCALE	APPROVALS			NO.
Δ	mm	1/1				PCM012-Rt6830Gft