

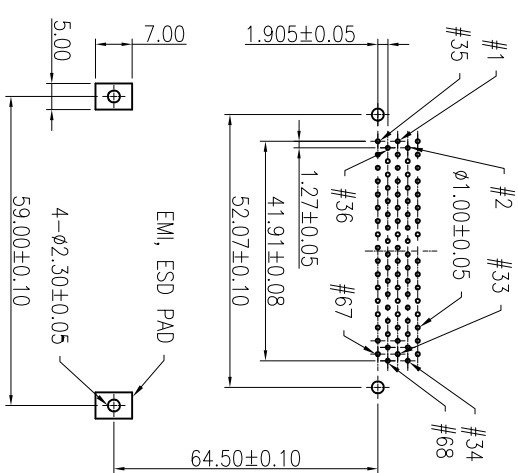
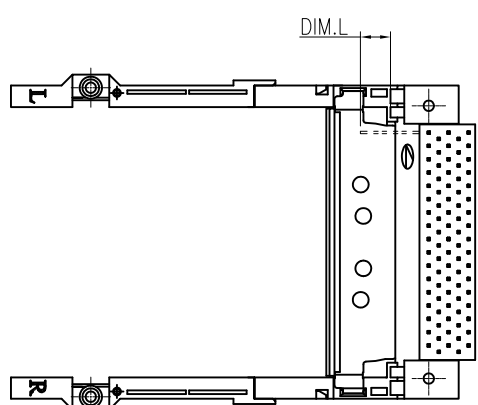
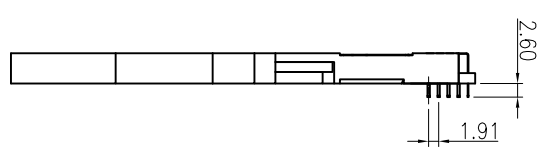
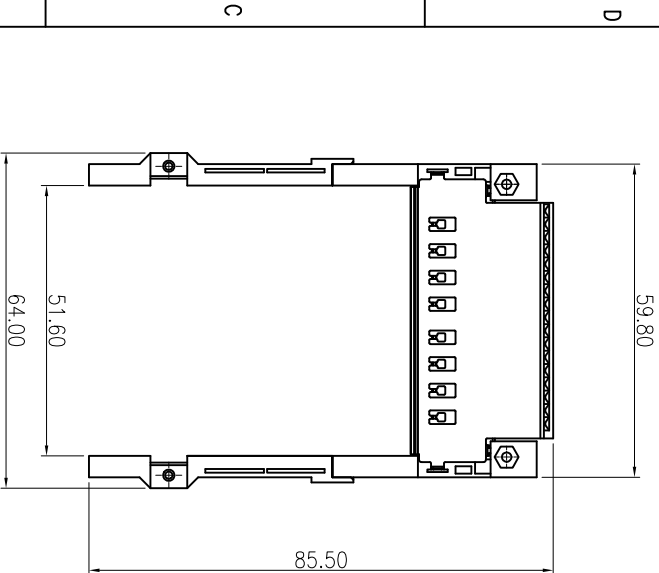


REVISIONS							
SYM	DISCRPTION	DATE	APPROVED	SYM	DISCRPTION	DATE	APPROVED
Δ				Δ			
Δ				Δ			
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!							418



RECOMMENDED HOLE PATTERN

PIN TYPE	DIM.L	PIN NUMBER
DETECT	3.50mm	36,37
GENERAL	4.25mm	ALL OTHER PINS
POWER	5.00mm	1,17,34,35,51,68

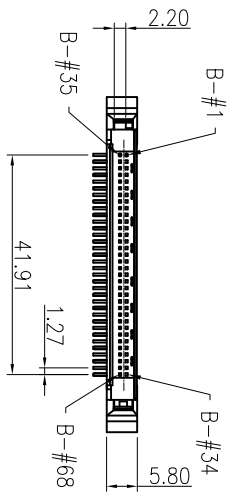

ORDER INFORMATION
PCM013-P66830GX
013: SERIES NUMBER
Pd: RIGHT ANGLE
68: 68 PINS
3: FOR CARD WORKING VOLTAGE
-3: 3.3V
0: STAND OFF 0.00mm
GX: CONTACT PLATING OPTION
Gft: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL
G10t: 10u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL

MATERIAL
INSULATOR: UL94V-0 LCP
CONTACT: COPPER ALLOY
SHELL: PHOSPHOR BRONZE
COLOR: BLACK
WITH 4 PCS M2 SCREWS
ACCEPT PCMCIA TYPE I, TYPE II CARD

TOLERANCES UNLESS OTHERWISE SPECIFIED			SIGNATURES		DATE	MODEL
±0.25			DRAWN	AARON	23/JUN/17	PCMCIA CONNECTOR
Δ			CHECKED	AMIE	23/JUN/17	
mm			APPROVALS			PCM013-P66830G_

MMT CORPORATION