
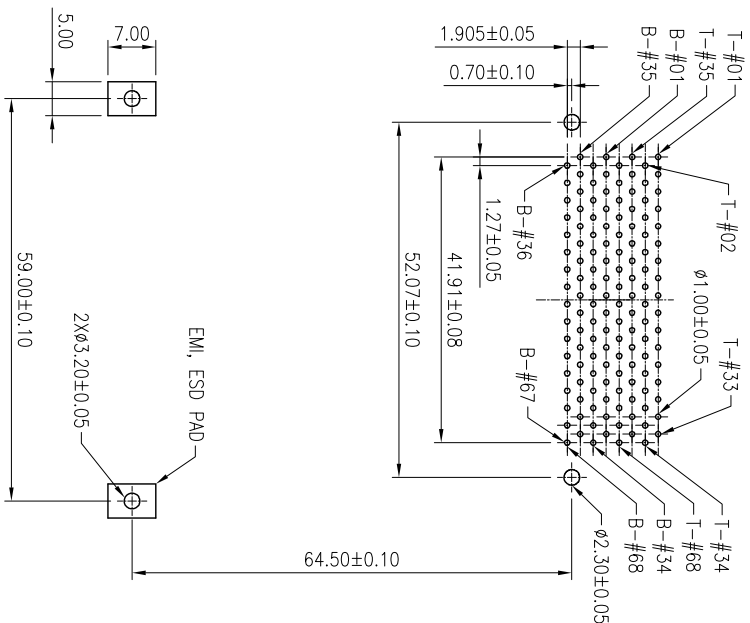


VI.1 NOTE: THIS DEVICE IS ROHS COMPLIANT.



REVISIONS						
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE
Δ				Δ		
Δ				Δ		
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!						418

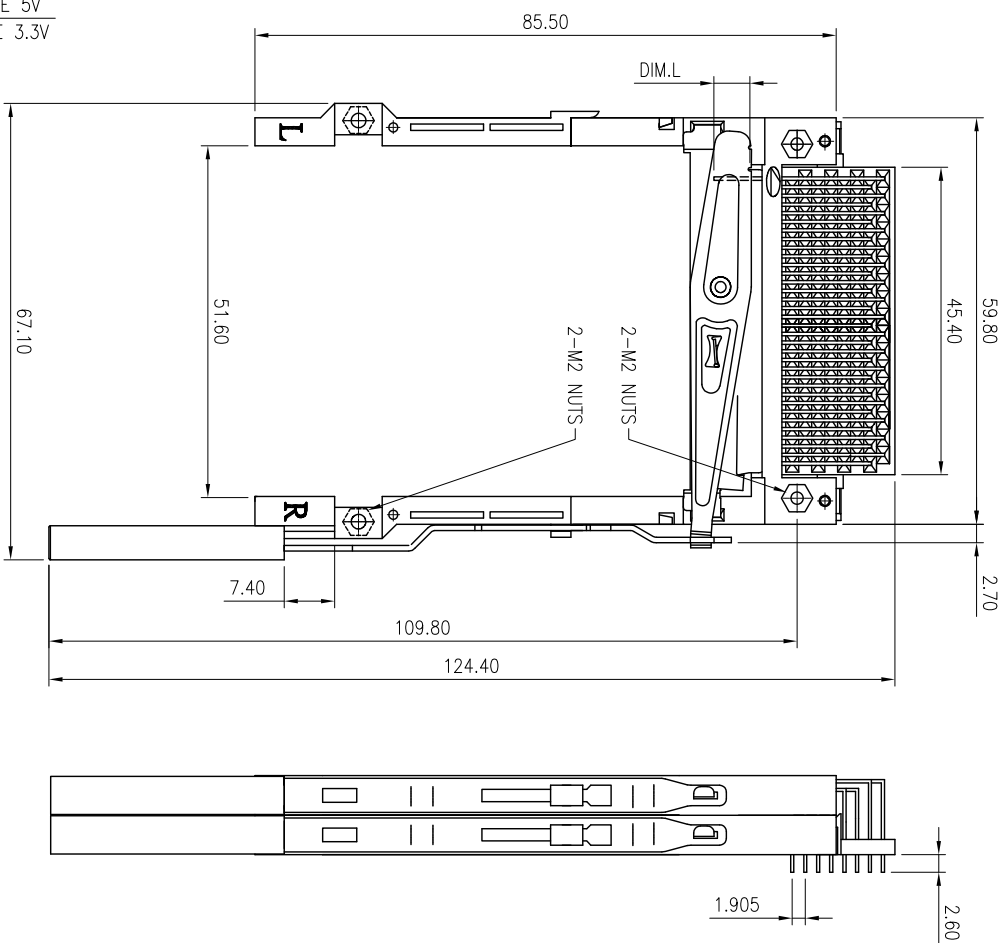

RECOMMENDED HOLE PATTERN

PIN TYPE	DIM.L	PIN NUMBER
DETECT	3.50mm	36,67
GENERAL	4.25mm	ALL OTHER PINS
POWER	5.00mm	1,17,34,35,51,68

ORDER INFORMATION:
PCM015-Pd6802X00GX-RE
PCM: POMCIA CARD CONNECTOR
015: SERIES NO.
68: 68 PINS
02: 2 LAYERS
X: CARD WORKING VOLTAGE OPTION
3: 3.3V
5: 5V
00: STANDARD OFF 0.00mm
GX: CONTACT PLATING OPTION
Gf: GOLD FLASH ON CONTACT,
TIN PLATED ON SOLDER TAIL
G10t: 10u" GOLD ON CONTACT,
TIN PLATED ON SOLDER TAIL
G15t: 15u" GOLD ON CONTACT,
TIN PLATED ON SOLDER TAIL
G30t: 30u" GOLD ON CONTACT,
TIN PLATED ON SOLDER TAIL
RE: EJECTOR DIRECTION; RIGHT SIDE

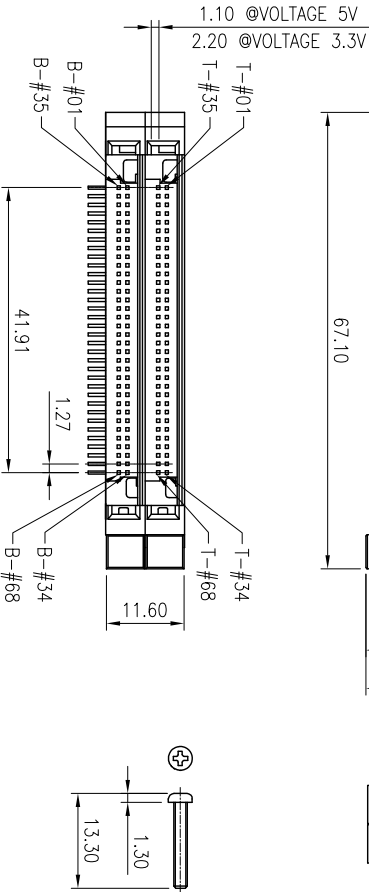

TOLERANCES UNLESS OTHERWISE SPECIFIED			SIGNATURES		DATE	MODEL	
±0.25			DRAWN	AARON	19/JUL/17	DOUBLE STACK	
			CHECKED	RYAN	19/JUL/17	PCM015-Pd6802X00G-RE	
SYMBOL	UNIT	SCALE	APPROVALS				
Δ	mm	1/1					

MMT CORPORATION

TEL:(510)979-2188

www.mmtmachine.com

FAX:(510)979-2189