
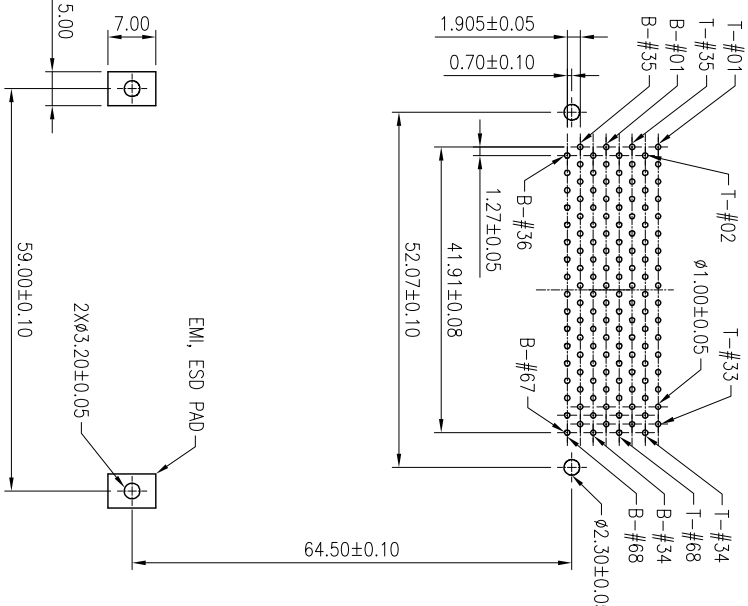


VI.1 NOTE: THIS DEVICE IS ROHS COMPLIANT.

REVISIONS						
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE
Δ				Δ		
Δ				Δ		
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!						418

MATERIAL
INSULATOR: UL94V-0, PBT
CONTACT: COPPER ALLOY
COLOR: BLACK
*WITH 4 PCS M2 SCREWS
*ACCEPT PCMCA TYPE I, TYPE II CARD

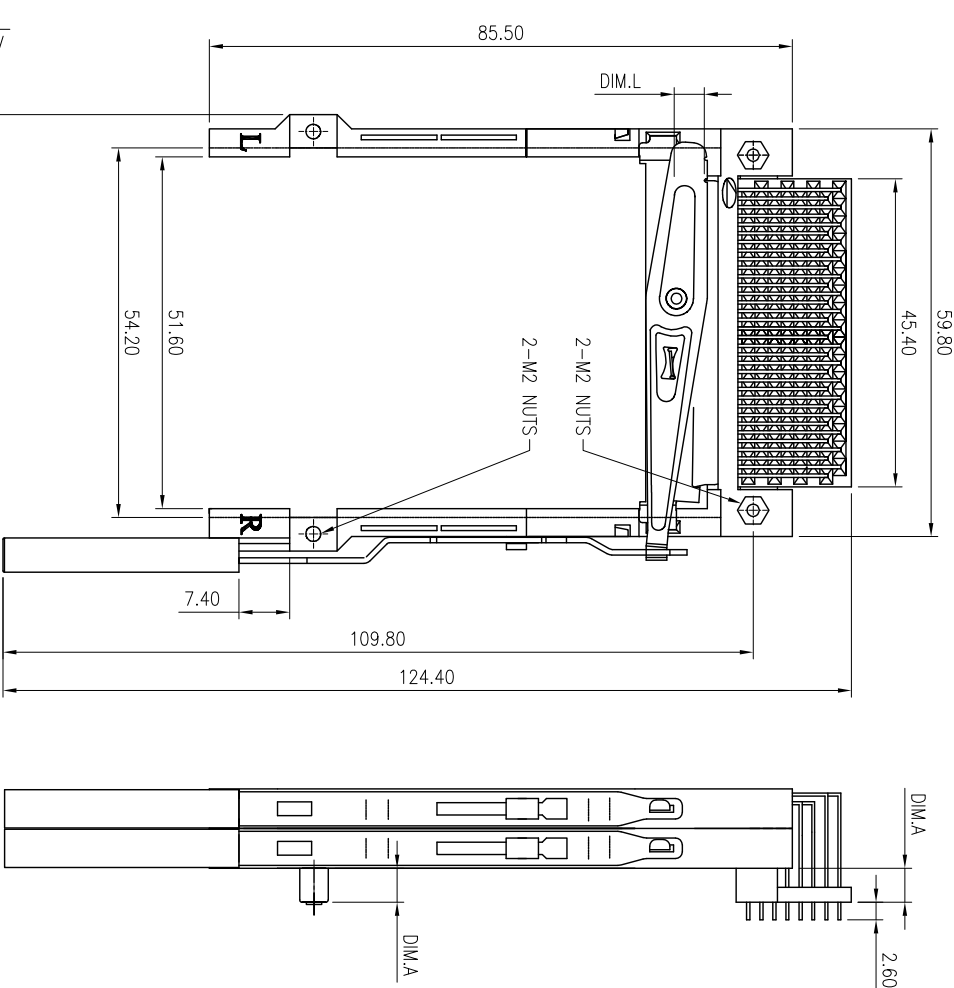

RECOMMENDED HOLE PATTERN

PIN TYPE	DIM.L	PIN NUMBER
DETECT	3.50mm	36,67
GENERAL	4.25mm	ALL OTHER PINS
POWER	5.00mm	1,17,34,35,51,68

ORDER INFORMATION:
PCM015-Pd6802XXGX-RE
PCM: PCMCA CARD CONNECTOR
015: SERIES NO.
68: 68 PINS
02: 2 LAYERS
X: CARD WORKING VOLTAGE OPTION
3: 3.3V
5: 5V
XX: STANDARD OFF OPTION
40: DIM.A=4.0mm, DIM.C=18.3mm
50: DIM.A=5.0mm, DIM.C=19.3mm
55: DIM.A=5.5mm, DIM.C=19.3mm
GX: CONTACT PLATING OPTION
Gft: GOLD FLASH ON CONTACT,
TIN PLATED ON SOLDER TAIL
G10t: 10u" GOLD ON CONTACT,
TIN PLATED ON SOLDER TAIL
G15t: 15u" GOLD ON CONTACT,
TIN PLATED ON SOLDER TAIL
G30t: 30u" GOLD ON CONTACT,
TIN PLATED ON SOLDER TAIL
RE: EJECTOR DIRECTION; RIGHT SIDE

TOLERANCES UNLESS OTHERWISE SPECIFIED			SIGNATURES		DATE	MODEL
±0.25			DRAWN	AARON	29/JUN/17	DOUBLE STACK
			CHECKED	RYAN	29/JUN/17	PCMCA CARD CONNECTOR
SYMBOL	UNIT	SCALE	APPROVALS			NO.
Δ	mm	1/1				PCM015-Pd6802-___G_-RE

MMT CORPORATION