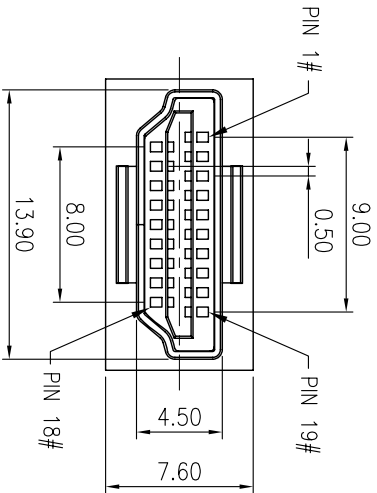


NOTE:

1.MATERIAL



- 1-1 CONTACT: BRONZE
- 1-2 FRONT HOUSING: LCP
- 1-3 BACK HOUSING: PBT+30%
- 1-4 SHELL: BRASS

2.PLATING

- 2-1 CONTACT: GOLD 15u"/TIN 100u"
- 2-2 SHELL: NICKEL

3.ELECTRICAL CHARACTERISTIC:

- 3-1 CONTACT RESISTANCE:
CONTACT: 30mΩ MAX.
SHELL: 50mΩ MAX.
- 3-2 INSULATION RESISTANCE:
UNMATED: 100MΩ MIN.
MATED: 10MΩ MIN.
- 3-3 DIELECTRIC STRENGTH: 500 VAC MIN.
- 3-4 CURRENT RATING: 0.5A MIN.
- 3-5 VOLTAGE RATING: 40 VAC.

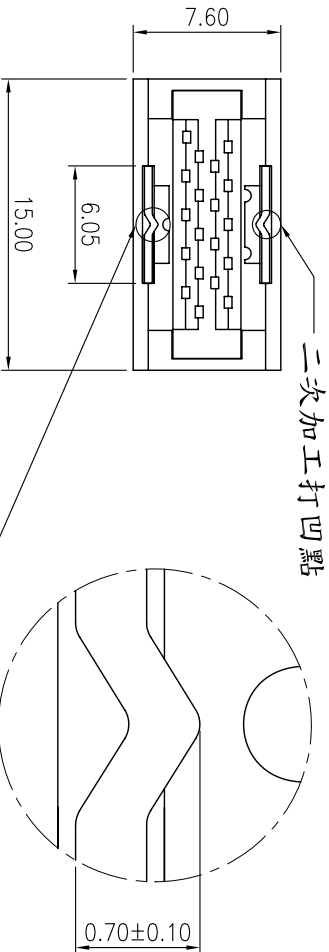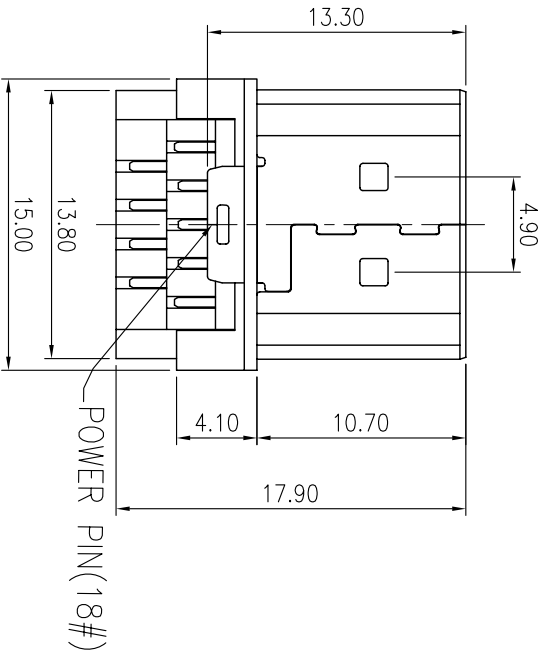

二次加工打凹點

REVISIONS						
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE
Δ				Δ		
Δ				Δ		
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!						255

ORDER INFORMATION:
HDMI001-W19G15t
HDMI: HDMI CONNECTOR
001: SERIES NO.
W: WIRE TYPE, STRAIGHT
19: NO. OF CONTACTS, 19 PINS
G15t: 15u" GOLD ON CONTACT,
TIN PLATED ON SOLDER TAIL

TOLERANCES UNLESS OTHERWISE SPECIFIED			SIGNATURES		DATE	MODEL
±0.25			DRAWN	AARON	14/AUG/07	HDMI CONNECTOR
CHECKED	WENDY	14/AUG/07	NO.			HDMI001-W19G15t
SYMBOL	UNIT	SCALE	APPROVALS			
Δ	mm	3/1				

MMT CORPORATION