


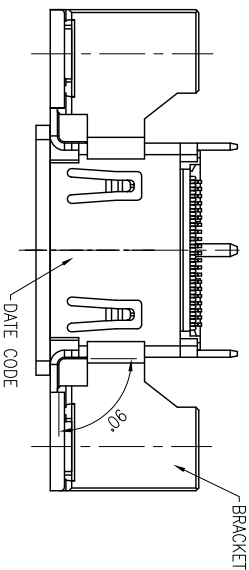
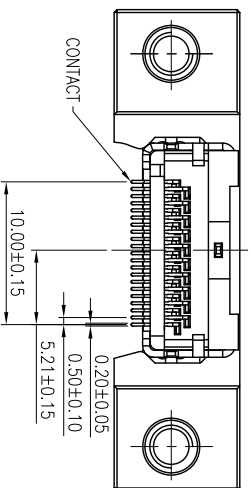


8 7 6 5 4 3 2 1


V1.1 NOTE: THIS DEVICE IS ROHS COMPLIANT.

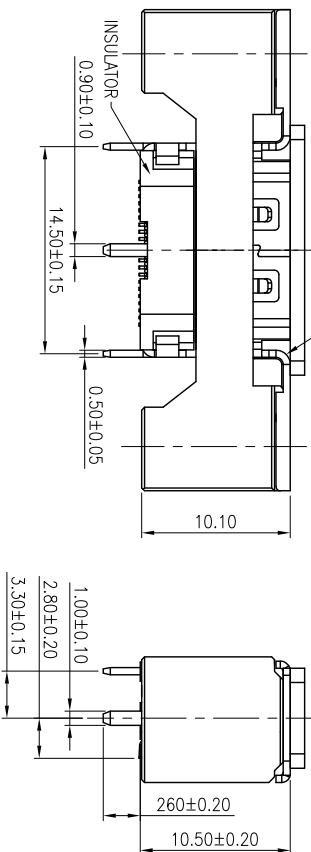

SEC A-A

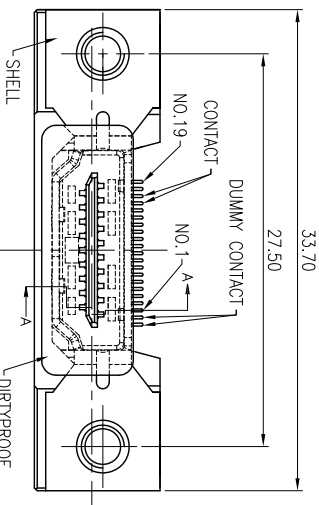

REVISIONS						
SYM	DISCRPTION	DATE	APPROVED	SYM	DISCRPTION	DATE
Δ				Δ		
Δ				Δ		
**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!						217

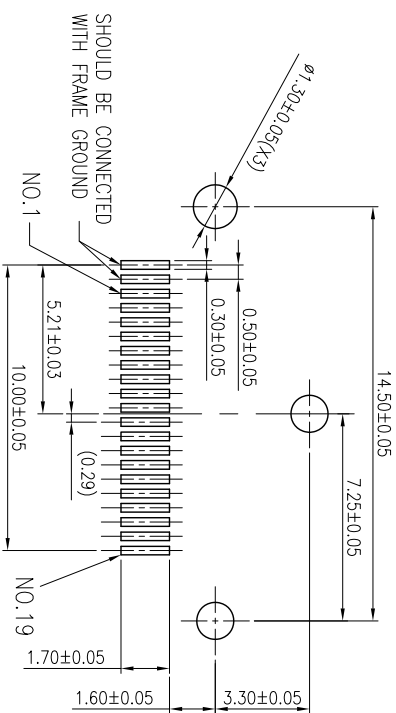

RECOMMEND P.C.B. LAYOUT(T=1.6mm)

MATERIAL
INSULATOR: THERMOPLASTIC UL94V-0 RATED,COLOR: BLACK
CONTACT: COPPER ALLOY
SHELL: COPPER ALLOY
BRACKET: THERMOPLASTIC UL94V-0,COLOR: BLACK
DIRTYPROOF: THERMOPLASTIC UL94V-0,COLOR: BLACK

PLATING
CONTACT: GOLD PLATED OVER NICKEL ON CONTACT AREA AND 100u" MIN.
TIN PLATED OVER NICKEL ON SOLDER TAILS
SHELL: SOLDERABLE NICKEL PLATED OVER NICKEL

ORDER INFORMATION:
HDMI005-Pt19NGX
HDMI: HDMI CONNECTOR
005: SERIES NO.
Pt: PCB TYPE, SURFACE MOUNT TYPE
19: 19 OF CONTACTS
N: SHELL PLATING; SOLDERABLE NICKEL PLATED
GX: CONTACT PLATING OPTION
Gt: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL
G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL

TOLERANCES UNLESS OTHERWISE SPECIFIED			SIGNATURES		DATE	MODEL
±0.30	DRAWN	AARON			04/JUN/16	HDMI CONNECTOR
	CHECKED	DIANA			04/JUN/16	
	APPROVALS					
						HDMI005-Pt19NG_

MMT CORPORATION

TEL:(510)979-2188

www.mmtmachrone.com

FAX:(510)979-2189